



ZCV39/42

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set – Five Piece, ZCV39RLT Refractory Brick Liner – Traditional and ZCV39S1BL Surround – Hearth Mount.



ZCV39/42

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

Model	ZCV39N ZCV39NE	ZCV39LP ZCV39LPE	ZCV39NH ZCV39NHE	ZCV39LPH ZCV39LPHE
Fuel	Natural	Propane	Natural	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
Input Max.	25,000 BTU	25,000 BTU	28,000 BTU	29,000 BTU
Input Min.	16,750 BTU	20,000 BTU	19,000 BTU	23,000 BTU
FE (P.4.1-15)	52.35% / 54.24%	52.35% / 54.24%	63.81% / 66.17%	66.82% / 68.65%
Glass Size	33" W x 28 5/8"H	33" W x 28 5/8"H	33" W x 28 5/8"H	33" W x 28 5/8"H
Venting	4/7" Flex or 4 x 6 5/8 Hard Pipe* or Power Vent			



Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, RBCB1 Cannonballs, ZCV39PL Porcelain Reflective Liner, ZCV39S2PFBL Surround – Picture Frame 1 5/8" Wide.



Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set – Five Piece, ZCV39RLS Refractory Brick Liner – Stacked.

*Consult the manual for all approved venting.

STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Pan burner with Realistic Flame Pattern
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Picture Frame Surrounds

ZCV39 Surrounds

- Hearth Mount 4" Wide (Covers 40 5/8" W x 35" H)
- Picture Frame 4" Wide (Covers 40 5/8" W x 37" H)
- Picture Frame 1 5/8" Wide (Covers 36 1/8" W x 32 1/2" H)

ZCV42 Surrounds

- Hearth Mount 4" Wide (Covers 44 5/8" W x 38 1/8" H)
- Picture Frame 4" Wide (Covers 44 5/8" W x 40 1/8" H)
- Picture Frame 1 5/8" Wide (Covers 40 1/8" W x 35 5/8" H)

Porcelain Reflective Liner

Glass Tray

Ember Glass (Bronze)

Accent Lighting

For use with the Glass Tray

Log Set

LOGF3 Log Set – Five Pieces

Brick Refractory Liner

Traditional, Herringbone, Red Herringbone and Stacked

Thermostat

Wall Mount Thermostat or Programmable Thermostat

Remote Control

Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

DESIGNER CLEAN VIEW™ FIREPLACES

ZCV42N	ZCV42LP	ZCV42NH	ZCV42LPH
ZCV42NE	ZCV42LPE	ZCV42NHE	ZCV42LPHE
Natural	Propane	Natural	Propane
Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
25,000 BTU	25,000 BTU	29,500 BTU	29,000 BTU
16,500 BTU	19,500 BTU	20,000 BTU	23,000 BTU
52.86% / 54.95%	52.86% / 54.95%	64.53% / 66.48%	66.65% / 68.77%
37 1/8" W x 31 3/4" H	37 1/8" W x 31 3/4" H	37 1/8" W x 31 3/4" H	37 1/8" W x 31 3/4" H

The ultimate in Zero Clearance Direct Vent Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.

OPTIONS



Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set - Five Piece, ZCV39RLH Refractory Brick Liner -Herringbone.



Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, RBCB1 Cannonballs, ZCV39PL Porcelain Reflective Liner.

STYLING




LOGF3 Log Set - Five Pieces



Multi-coloured Cannonballs




Decorative Ember Glass - Bronze




Traditional Brick Liner RLT



Herringbone Brick Liner RLH



Red Herringbone Brick Liner RRH




Stacked Brick Liner RLS

CORNER

	ZCV39	ZCV42
A	39 1/2"	42 1/2"
B	11 3/4"	11 3/4"
C	31 1/2"	33"
D	19"	20 1/2"
E	43"	45 1/8"
F	39 1/2"	41 5/8"
G	-	-
H	-	-

FRONT VIEW

	ZCV39	ZCV42
A	39 3/8"	42 3/8"
B	24 1/8"	27 1/4"
C	29 5/8"	33 3/8"
D	33"	37 1/8"
E	34 1/2"	37 3/8"
F	37 3/4"	40 7/8"
G	3"	2 1/2"
H	29 3/8"	32 1/2"

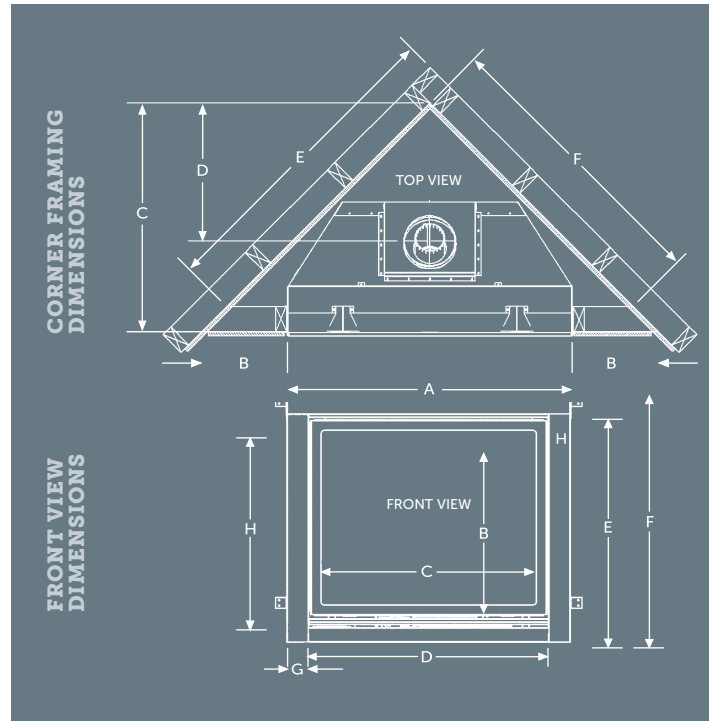

UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models	Height Actual	Height Framing	Width Actual	Width Framing	Depth Actual	Depth Framing
ZCV39	37 1/4"	37 1/8"	39 3/8"	39 1/2"	18 3/8"	18 1/2"
ZCV42	40 1/8"	41"	42 3/8"	42 1/2"	18 3/8"	18 1/2"



2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com

ZCV39/42

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



Canada
ENERGUIDE
Look for the **EnerGuide**
Gas Fireplace Energy
Efficiency Rating in this brochure
Based on CSA P.4.1-15

Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, Z5GC Glass Media – 1/2" Bronze – 5 lbs (x3), ULK2 Universal Light Kit, ZCV39PL Porcelain Reflective Liner, ZCV39S1PFBL Surround – Picture Frame 4" Wide.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: ZCV39N, ZCV39NE, ZCV39LP, ZCV39LPE, ZCV42N, ZCV42NE, ZCV42LP, ZCV42LPE are Certified to: ANSI Z21.50-2014, CSA 2.22-2014, CGA 2.17-M91 (R2009) Vented Gas Fireplace. ZCV39NH, ZCV39NHE, ZCV39LPH, ZCV39LPE, ZCV42NH, ZCV42NHE, ZCV42LPH, ZCV42LPE are Certified to: ANSI Z21.88-2014, CSA 2.33-2014, CGA 2.17-M91 (R2009) Vented Gas Fireplace Heater.



CRAFTED ENTIRELY IN CANADA, EACH KINGSMAN FIREPLACE IS BUILT TO THE HIGHEST STANDARDS AND MADE TO LAST.

Printed in Canada
01/18 – B080