

MCVST42

ZERO CLEARANCE **DIRECT VENT** SEE-THROUGH GAS FIREPLACE





MCVST42

ZERO CLEARANCE **DIRECT VENT**SEE-THROUGH GAS FIREPLACE

Model Fuel Gas Control Input Max. Input Min. FE (P.4.1-15)

Glass Type

MCVST42N/NE Natural Millivolt / IPI 30,250 BTU 20,750 BTU 57.56% / 59.55% Tempered

MCVST42LP/LPE Propane Millivolt / IPI 29,000 BTU 23,000 BTU 58.56% / 55.32% Tempered MCVST42NH/NHE MCVST42LPH/LPHE
Natural Propane
Millivolt / IPI Millivolt / IPI
31,000 BTU 29,250 BTU
21,000 BTU 23,000 BTU
66.45% / 68.58% 67.88% / 70.36%
Ceramic Ceramic



- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Safety Screen Barrier



OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Surrounds

- Hearth Mount 4" Wide (Covers 44 5/8" W x 38 1/8" H)
- Picture Frame 4" Wide (Covers 44 5/8" W x 40 1/8" H)
- Picture Frame 1 5/8" Wide (Covers 40 1/8" W x 35 5/8" H)

Porcelain Reflective Liner

Brick Refractory Liner

Traditional

Glass Tray

For use with Bronze Glass Media, Cannonballs, and Driftwood Log Set

Accent Lighting

For use with the Glass Tray

Log Set

Oak (8 piece) Set, and Driftwood (6 Piece) Set

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control





DESIGNER CLEAN VIEW™ FIREPLACES

Make the most of the best view in the house with our line of Zero Clearance Direct Vent See-Through Gas Fireplaces. Ideally suited for new construction or renovations anywhere in your home.

END

OPTIONS



Model MCVST42NH See-Through Fireplace – Natural Gas, ZCV42S2PFBL Surround Picture Frame 1 5/8" Wide, MST42GT Glass Tray, ZG5C Glass Media - Bronze x (5), RBCB1 Cannonballs, MST42PL Porcelain Liner.

STYLING



M42LOG4 Oak Log Set



M42LOG3 Driftwood Log Set



RBCB1 Multi-colored Cannonballs




MP42RLT Traditional MQG5C Decorative Ember Glass

VIEW		VIEW	VIEW		
Α	43 ½16"	-	-		
В	37 ¹ / ₁₆ "	-	-		
C	33 11/16"	-	-		
D	27 3/16"	-	-		
Ε	2 1/2"	-	-		
F	32 ½"	=	-		
G	2"	=	-		
Н	3 1/8"	-	-		
	3 ½"	-	-		
J	7 1/4"	-	-		
К	-	23 1/8"	-		
L	-	24 1/4"	-		
Μ	-	-	24 1/4"		
Ν	-	=	51 ¹/4"		
0	-	=	42 7/8"		

TOP

FRONT

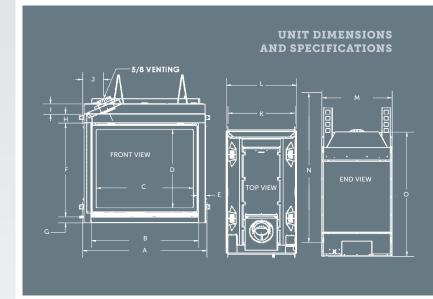

UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models		Height Framing	Width Actual			Depth Framing
MCVST42	51 ½"	51 ³/s"	43 1/16"	43 ½"	24 ¹ / ₄ "	23 1/16"



2340 Logan Avenue

Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960

www.kingsmanfireplaces.com

MCVST42

ZERO CLEARANCE **DIRECT VENT** SEE-THROUGH GAS FIREPLACE





Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.
Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice
for obligation. Certification: MCVST42N, MCVST42N, MCVST42N, MCVST42NP, and MCVST42NP, and MCVST42NP, MCVST42NP, MCVST42NP, MCVST42NP, MCVST42NP, MCVST42NP, MCVST42NP, and MCVST42NP, MCVST42NP, MCVST42NP, and MCVST42NP, MC

Printed in Canada 01/18 - B085

