

ZVF33

ZERO CLEARANCE **VENT FREE** GAS FIREPLACE



www.kingsmanfireplaces.com



 ZVF33
 FUEL
 GAS CONTROL
 MAX.
 LOW

 ZVFB3330MAN
 Natural
 Manual
 30,000
 13,000

 ZVFB3330MAP
 Propane
 Manual
 30,000
 22,000

 ZVFB3330MVN
 Natural
 Millivolt
 30,000
 13,000

 ZVFB3330MVP
 Propane
 Millivolt
 30,000
 22,000

STANDARD FEATURES

- Hi/low Millivolt or manual valve with variable adjustment of flame and BTU
- An ODS sensor that constantly monitors the room air and provides 100% gas shut off if oxygen is reduces below acceptable levels
- Black Canopy Hood
- Matchless Piezo Ignition
- Pull Screen
- Decorative Ash Bed
- Wall Switch Control (for Millivolt Systems Only)

OPTIONAL FEATURES

Fan Kit

Heat activated blower with variable speed control

Grills

Black

Surrounds Wide

Black

Coverage:

• 31 3/16" h x 36 5/8" w

Thermostat (Millivolt)

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control (Millivolt)

On/Off, Thermostat or Hi/Lo On/Off




LOGF18 and LOGF24



CORNER FRAMING DIMENSIONS (IN.)

	Α	В	С	D	E	F
ZVF33	30¾"	421/8″	605/8″	33½″	32½″	13%16″

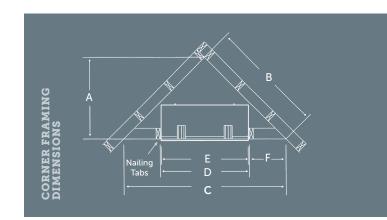

VENT-FREE FIREBOX UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models				Width Framing	- 1	Depth Framing
ZVF33	30 ½"	31"	32 ½"	33 1/8"	14"	14"

The ultimate in Zero Clearance Vent-Free Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.





LOGF18 Log Set

LOGF24 Log Set

