




PRODUCT GUIDE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

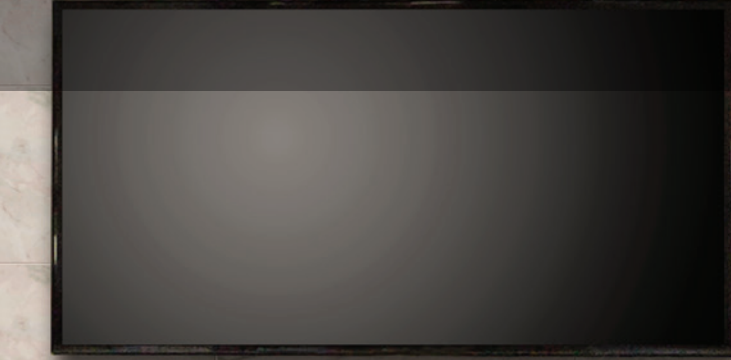

FIREPLACE BASICS

DIRECT VENT GAS FIREPLACES

Coaxial vent system of a pipe inside a pipe (generally 4"/7") the inside pipe is for exhaust, while the outer pipe brings in outside air for combustion. The design of these fireplaces allow for a completely sealed system that does not compromise inside air quality of your home. It also lets you vent a product horizontally (great for when an appliance is installed on an outside wall). Direct vent appliances are usually limited to a length of 40ft (with a maximum horizontal length of 20ft) that will allow an appliance to function properly.

VENTED GAS FIREPLACES

Uses air-cooled pipe (B-vent), or gas flex liners to vent appliances. These types of appliances use room air for combustion and exhaust through the B-vent pipe or flexible gas liner. Vented appliances are not as restricted in venting length as compared to direct-vent appliances and can utilize existing chimney systems by running a gas flex liner into existing chimneys and terminating with a raincap and flashing.

VENT FREE GAS FIREPLACES

No chimney systems are required and this product can be used almost anywhere in your home (except in bathroom, bedroom, spa room, mobile home, or recreational vehicle), but provisions for adequate combustion and ventilation must be provided (room size and btu's of appliance are the deciding factors of what btu size can be used for a particular installation). The appliance uses room air for combustion and exhausts to the room. These appliances are 99.9% efficient and the vent-free burner systems have an ODS pilot system, which ensures that the burner systems will shut down if oxygen in the room falls below acceptable limits. Approved for use in the USA only.



CRAFTED ENTIRELY IN CANADA, EACH KINGSMAN FIREPLACE IS BUILT TO THE HIGHEST STANDARDS AND MADE TO LAST.

COVER UNIT: Model VRB46N Zero Clearance Direct Vent Gas Fireplace – Natural Gas, ZRB46PL Porcelain Liners, V46EG Enclosure Grill.

KINGSMAN ZERO CLEARANCE FIREPLACE REFERENCE SHEET

24" ZERO CLEARANCE FIREPLACE

Framing Size: 24³/₈" wide x 30" high x 12³/₄" deep

| | RATING | GLASS TYPE | LOGS | FAN KIT OPTION | BRICK LINER OPTION |
|-----------------|-----------|-------------|--------|----------------|--------------------|
| Vent Free ZVF24 | Vent Free | Pull Screen | LOGF10 | Z33FK | ZVF24RLT/ZVF24RLH |

33" ZERO CLEARANCE FIREPLACES

Framing Size with Louvers: 33¹/₈" wide x 31" high

ZVF33: 13³/₄" deep ZDV3318: 15¹/₄" deep

** Clean View Framing Size: 33⁷/₈" wide x 33³/₈" high X 17³/₄" deep

| | RATING | GLASS TYPE | LOGS | FAN KIT OPTION | BRICK LINER OPTION | PORCELAIN LINER |
|-----------------------|-----------|-------------|---------------|----------------|--------------------|-----------------|
| Direct Vent ZDV3318** | Heater | Tempered | LOGC50 | Z33FK | Z3318ML | Z3318PRL |
| Vent Free ZVF33 | Vent Free | Pull Screen | LOGF18/LOGF24 | Z33FK | - | - |

36" ZERO CLEARANCE FIREPLACES

** Framing Size with Louvers: 36³/₈" wide x 35" high x 17" deep

*** Framing Louvers: 36³/₈" wide x 34" high x 15³/₈" deep

** Clean View Framing Size: 38⁷/₁₆" wide x 41" high x 19¹/₂" deep

* ZCV: 36³/₈ wide x 37¹/₄" high x 17¹/₂" deep

| | RATING | GLASS TYPE | LOGS | FAN KIT OPTION | BRICK LINER OPTION | PORCELAIN LINER |
|-------------------------|------------|------------|--------------|----------------|---------------------|-----------------|
| Direct Vent ZCVRB3622* | Heater | Tempered | Bronze Glass | Z36FK | - | Z3622PRL |
| Direct Vent ZCV3622* | Heater | Tempered | LOGC51 | Z36FK | ZCV3622ML | ZCV3622PRL |
| Direct Vent HBZDV3624** | Decorative | Tempered | LOGC42/43/44 | Z36FK | HB36RLT/LH/RLC/RRH | HB36PL |
| Direct Vent HBZDV3628** | Heater | Ceramic | LOGC42/43/44 | Z36FK | HB36RLT/RLH/RLC/RRH | HB36PL |
| Vented ZV3600*** | Decorative | Tempered | LOGC42/43/44 | Z33FK | Z36RL | - |

39" ZERO CLEARANCE FIREPLACES

ZCV39 Framing: 39¹/₂" wide x 37⁷/₈" high x 18¹/₂" deep

ZVFCV39 Framing: 39¹/₂" wide x 37⁷/₈" H x 20⁵/₁₆" deep

| | RATING | GLASS TYPE | LOGS | FAN KIT OPTION | BRICK LINER OPTION | PORCELAIN LINER |
|-------------------|-------------------|------------------|------------|----------------|----------------------|-----------------|
| Direct Vent ZCV39 | Heater/Decorative | Tempered/Ceramic | LOGF3 | Z46FK | ZCV39RLT/RLH/RRH/RLS | ZCV39PL |
| Vent Free ZVFCV39 | Universal | Pull Screen | LOGF18/F24 | Z46FK | ZCV39RLT/RLH/RRH/RLS | - |

42" ZERO CLEARANCE FIREPLACES

** Framing Size with Louvers: 42³/₈" wide x 37¹/₈" high x 17" deep

ZVFCV42 Framing Size: 42¹/₂" wide x 41" high x 20⁵/₁₆" deep

** Clean View Framing Size: 42⁷/₁₆" wide x 43" high x 19¹/₂" deep

ZCV42 Framing Size: 42¹/₂" wide x 41" high x 18¹/₂" deep

| | RATING | GLASS TYPE | LOGS | FAN KIT OPTION | BRICK LINER OPTION | PORCELAIN LINER |
|-------------------------|-------------------|------------------|--------------|----------------|----------------------|-----------------|
| Direct Vent HBZDV4224** | Decorative | Tempered | LOGC42/43/44 | Z36FK | HBRLT/RLH/RRH | HB42PL |
| Direct Vent HBZDV4228** | Heater | Ceramic | LOGC42/43/44 | Z36FK | HBRLT/RLH/RRH | HB42PL |
| Vent Free ZVFCV42 | Universal | Pull Screens | LOGF18/F24 | Z46FK | ZCV42RLT/RLH/RRH/RLS | - |
| Direct Vent ZCV42 | Heater/Decorative | Tempered/Ceramic | LOGF3 | Z46FK | ZCV42RLT/RLH/RRH/RLS | ZCV42PL |

47" ZERO CLEARANCE FIREPLACES

** Framing Size with Louvers: 47³/₈" wide x 43³/₁₆" high x 19¹/₂" deep

ZVFCV47 Framing 48¹/₂" wide x 45⁷/₁₆" high x 22⁵/₈" deep

** Clean View Framing 48³/₈" wide x 49" high x 22" deep

VRB46 Framing 47" wide x 43³/₄" high x 18¹/₄" deep

| | RATING | GLASS TYPE | LOGS | FAN KIT OPTION | BRICK LINER OPTION | PORCELAIN LINER |
|-------------------------|------------|--------------|--------------|----------------|--------------------|-----------------|
| Direct Vent VRB46 | Heater | Tempered | Bronze Glass | Z46FK | - | ZRB46PL |
| Direct Vent HBZDV4736** | Decorative | Tempered | LOGF36 | Z36FK | HB47RLT/RLH/RRH | HB47PL |
| Vent Free ZVFCV47 | Universal | Pull Screens | LOGF24/30 | Z46FK | ZCV48RLT/RLH/RLS | - |

MULTI VIEW ZERO CLEARANCE FIREPLACES (Corner, See-Through, Peninsula, Island MVF40 only)

Framing size depends on view - See Manual

| | RATING | GLASS TYPE | LOGS | FAN KIT OPTION | BRICK LINER OPTION |
|-------------------|-------------------|------------------|-----------|----------------|--------------------|
| Direct Vent MDV31 | Decorative | Tempered | LOGC31 | Z36FK | MDV38RLE/MDV38RLS |
| Vent Free MVF40* | Universal | Pull Screen | LOGC31 | Z36FK | MDV38RLE/MDV38RLS |
| MCVP42 | Decorative/Heater | Tempered/Ceramic | M42LOG3/4 | - | MP42RLT/MP42PL |
| MCVST42 | Decorative/Heater | Tempered/Ceramic | M42LOG3/4 | Z46FK | MST42RLT/MST42PL |

* Universal rated vent free units are approved for other manufacturer's log sets. Vent free burners and logs are available from Kingsman as a system. All millivolt systems are remote ready, Manual systems are not.

* Vent Free is approved for use in the USA only.



GAS FIREPLACES

Warm up your favorite room with the beauty of a Kingsman Gas Fireplace. Available in natural gas and propane, Kingsman quality fireplaces let you enjoy the beauty of glowing embers and dancing flames.

Create an elegant and warm focal point in your home. Choose from a variety of decorative options, including log sets, to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 40 years of experience.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Direct Vent

| | |
|------------------------------|------|
| ZDV3318/ZCV3622 | 1.2 |
| ZCVRB3622 | 1.6 |
| HBZDV3624/28 HBZDV4224/28 | 1.8 |
| HBZDV4736 | 1.10 |
| VRB46 | 1.12 |
| ZCV39/42 | 1.14 |

Vented

| | |
|--------|------|
| ZV3600 | 1.18 |
|--------|------|



ZDV3318 / ZCV3622

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model ZCV3622N Zero Clearance Direct Vent Natural Gas Fireplace, LOGC51 Oak Log Set, ZCV3622ML Metal Brick Liner, and ZCV36S1BL Black Surround.

Enjoy an incredible line of options and styles – from contemporary to classic – plus the beauty and pleasure of a cozy fire.

| Model | ZDV3318N/NE | ZDV3318LP/LPE | ZCV3622N/NE | ZCV3622LP/LPE |
|---------------|-----------------|-----------------|-----------------|-----------------|
| Fuel | Natural | Propane | Natural | Propane |
| Input Max. | 19,000 BTU | 18,000 BTU | 18,000 BTU | 18,000 BTU |
| Input Min. | 12,100 BTU | 11,900 BTU | 13,000 BTU | 15,000 BTU |
| FE (P.4.1-15) | 51.72% / 54.25% | 55.49% / 57.91% | 60.54% / 63.46% | 62.09% / 65.09% |

ZDV3318


LOUVERED CLEAN VIEW

| | | |
|---|----------------------------------|-----------------------------------|
| A | 43 ³ / ₄ " | 48 ⁷ / ₈ " |
| B | 33" | 33 ⁷ / ₈ " |
| C | 32 ¹ / ₂ " | 33 ⁹ / ₁₆ " |
| D | 5 ³ / ₈ " | 7 ¹ / ₂ " |
| E | 31" | 34 ⁹ / ₁₆ " |
| F | 8 ¹ / ₂ " | 8 ¹ / ₂ " |
| G | 12" | 12" |
| H | 21 ⁷ / ₈ " | 24 ⁷ / ₁₆ " |


VIEW AREA

| Width | Height |
|----------------------------------|-----------------------------------|
| 25 ¹ / ₂ " | 14 ⁹ / ₁₆ " |

Vertical Flue Option #1

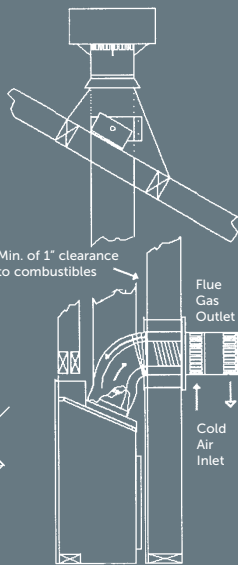


Horizontal Flue Option #2

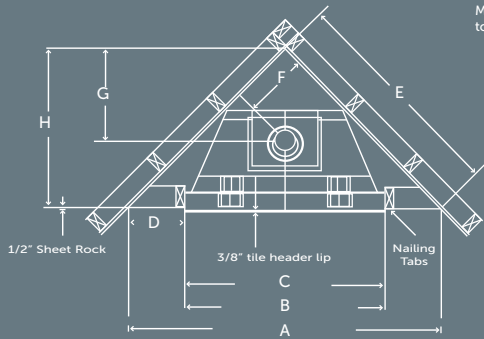

ZCV3622

| | |
|---|----------------------------------|
| A | 53 ¹ / ₂ " |
| B | 36 ³ / ₈ " |
| C | 8 ⁹ / ₁₆ " |
| D | 12" |
| E | 37 ⁷ / ₈ " |
| F | 26 ³ / ₄ " |

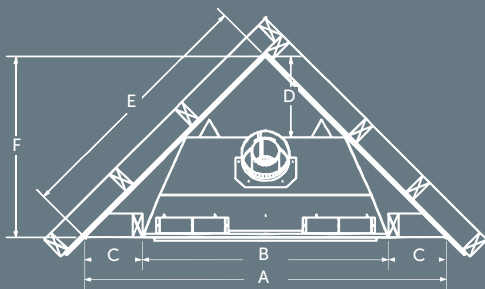

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Top Flue Models | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|-----------------|---------------|----------------|--------------|---------------|--------------|---------------|
|-----------------|---------------|----------------|--------------|---------------|--------------|---------------|

LOUVERS (ZDV3318 model only)

| | | | | | | |
|---------|----------------------------------|-----|----------------------------------|-----|----------------------------------|----------------------------------|
| ZDV3318 | 30 ¹ / ₂ " | 31" | 32 ³ / ₈ " | 33" | 15 ⁵ / ₄ " | 15 ¹ / ₄ " |
|---------|----------------------------------|-----|----------------------------------|-----|----------------------------------|----------------------------------|

CLEAN VIEW

| | | | | | | |
|----------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------|-----------------------------------|----------------------------------|
| ZDV3318* | 30 ³ / ₈ " | 33 ³ / ₈ " | 33 ⁹ / ₁₆ " | 33 ⁷ / ₈ " | 18 ³ / ₁₆ " | 17 ³ / ₄ " |
| ZCV3622 | 33 ¹ / ₂ " | 37 ¹ / ₄ " | 36" | 36 ³ / ₈ " | 17 ⁷ / ₁₆ " | 17 ¹ / ₂ " |

*ZDV3318 and Z33CVCK Clean View Kit



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



ZDV3318 / ZCV3622

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

Take advantage of
the fully dedicated
Clean View Unit!



STANDARD FEATURES*

- Hi/low Millivolt or IPI valve system, will operate during power failures
- Proprietary burner, with realistic burn
- Mobile Home, Bedroom and Bed Sitting Room approved
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Designer Clean View Circulating Kit – (ZDV3318 only)

No louvers required

Grills– (ZDV3318 only)

Available in Black

Surrounds Wide (Louvered Units) – (ZDV3318 only)

Available in Black

Coverage • ZDV3318 – 31 3/16" h x 36 5/8" w

Surround – Black – (ZCV3622 only)

Covers Framing Dimensions (39" w x 34 1/16" h)

Fan Kit

Heat activated with variable speed control

Wall Mount Thermostat

Standard On/Off or Programmable
5 day (weekday) and 2 day (weekend)

Remote Control

On/Off, Thermostat On/Off,
Thermostat On/Off modulating

Liners

Porcelain Reflective Liner,
Metal Brick Liner

Log Set

LOGC50 Oak Log Set (ZDV3318 only)
LOGC51 Oak Log Set (ZCV3622 Only)



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Enjoy the elegance and warmth of glowing embers and dancing flames around our traditional oak log set. It is sure to be the focal point of your home. Choose from a variety of decorative options to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value. With a fully sealed combustion chamber there is no pollution spillage to depreciate the indoor air quality of your home.

With a variety of decorative options,
you can create a distinctive look
and be assured of complete safety,
comfort and long-lasting value.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



ZCVRB3622

ZERO CLEARANCE **DIRECT VENT** LINEAR GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

ZCVRB3622N Zero Clearance Direct Vent Natural Gas Linear Fireplace, Decorative Bronze Glass, ZCVRB36SSS Surround Trim Kit – Stainless Steel, Z3622PRL Porcelain Reflective Liner, optional ULK2 Universal Light Kit.

Warm up your favourite room with the beauty of a Linear Fireplace.

| | | |
|----------------------|---------------------------|-----------------------------|
| Model | ZCVRB3622N ZCVRB3622NE | ZCVRB3622LP ZCVRB3622LPE |
| Fuel | Natural | Propane |
| Input Max. | 17,500 | 17,500 |
| Input Min. | 12,000 | 14,000 |
| FE (P.4.1-15) | 61.36% / 65.82% | 62.72% / 64.55% |

The ultimate in Zero Clearance Direct Vent Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.

STANDARD FEATURES

- Hi/Low Millivolt or IPI valve system will operate during power failures
- Decorative Bronze Glass
- Mobile Home, Bedroom and Bed Sitting Room approved
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Surround Trim Kit

Black and Stainless Steel (36" w x 22 1/2" h)

Fan Kit

Heat activated with variable speed control

Wall Mount Thermostat

Standard On/Off or Programmable
5 day (weekday) and 2 day (weekend)

Remote Control

On/Off, Thermostat On/Off,
Thermostat On/Off modulating



Porcelain Reflective Liner

Universal Light Kit

Two Lamps

Glass Tray

Ember Glass (Bronze)

Multi-colored Cannonballs




Multi-coloured Cannonballs



Decorative Ember Glass - Bronze

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|----------------------------------|----------------------------------|--------------|----------------------------------|-----------------------------------|----------------------------------|
| 37 ¹ / ₈ " | 37 ¹ / ₄ " | 36" | 36 ³ / ₈ " | 17 ⁷ / ₁₆ " | 17 ¹ / ₂ " |

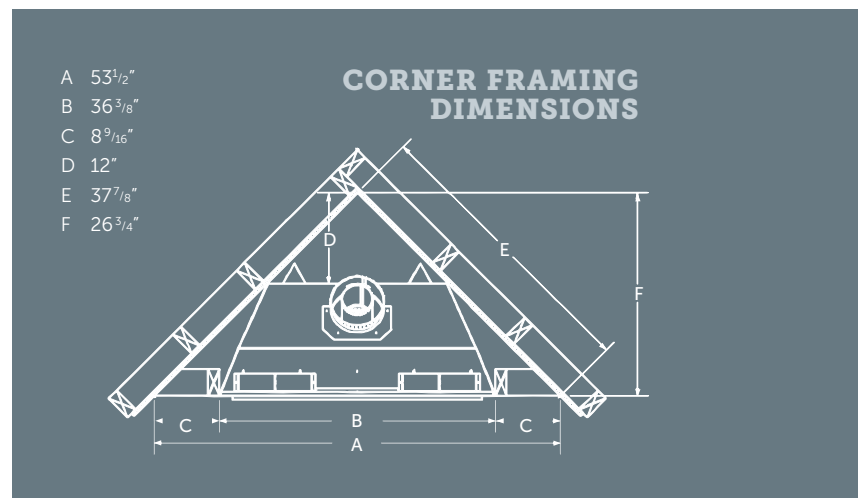

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



HBZDV3624/28, HBZDV4224/28

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model HBZDV3628N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGC44 Log Set, HB36CVCK Designer Clean View Circulating Kit, and HB36RRH Red Herringbone Refractory Liner.

Kingsman's Direct Vent models are easily adaptable to our patented Designer Clean View technology or standard louvers. Enjoy an incredible line of options and styles – from contemporary to classic – plus the beauty and pleasure of a cozy fire.

| Model | HBZDV3624N | HBZDV3624LP | HBZDV3628N | HBZDV3628LP | HBZDV4224N | HBZDV4224LP | HBZDV4228N | HBZDV4228LP |
|--------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Flue | HBZDV3624NE | HBZDV3624LPE | HBZDV3628NE | HBZDV3628LPE | HBZDV4224NE | HBZDV4224LPE | HBZDV4228NE | HBZDV4228LPE |
| Fuel | Top | Top | Top | Top | Top | Top | Top | Top |
| Input Max. | 24,000 BTU | 22,000 BTU | 28,000 BTU | 26,000 BTU | 24,000 BTU | 22,000 BTU | 28,000 BTU | 26,000 BTU |
| Input Min. | 14,000 BTU | 15,000 BTU | 20,000 BTU | 19,000 BTU | 14,000 BTU | 15,000 BTU | 20,000 BTU | 19,000 BTU |
| FE (P4.1-15) | 50.48%/52.3% | 52.59%/54.24% | 60.61%/62.69% | 62.48%/64.16% | 55.69%/57.81% | 57.03%/59.09% | 68.04%/70.16% | 65.29%/67.66% |

STANDARD FEATURES

- Millivolt or IPI valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Designer Clean View Circulating Kit
(No Louvers Required)

Grills

Available in Black

Surrounds Wide (Louvered Units)

Available in Black

Coverage • HBZDV3624/28 – 35 1/2" h x 41 1/8" w

Coverage • HBZDV4224/28 – 37 5/8" h x 45 1/8" w

Fan Kit

Heat activated with variable speed control

Brick Refractory Liner

Traditional, Herringbone, and Red Herringbone

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control



Log Sets

Choose from the three available log sets, LOGC42 Classic Oak Four Piece, LOGC43 Traditional Oak Four Piece or LOGC44 Burnt Oak Eight Piece Log Set



LOGC42



LOGC43


CORNER FRAMING DIMENSIONS

LOUVERED

| | HBZDV36 | HBZDV42 |
|---|------------------------------------|------------------------------------|
| A | 54 ¹³ / ₁₆ " | 58 ¹³ / ₁₆ " |
| B | 36 ³ / ₈ " | 42 ³ / ₈ " |
| C | 36" | 42" |
| D | 9 ³ / ₁₆ " | 8 ¹ / ₄ " |
| E | 38 ³ / ₄ " | 41 ⁵ / ₈ " |
| F | 12 ³ / ₈ " | 13 ³ / ₄ " |
| G | 17 ⁹ / ₁₆ " | 19 ¹ / ₂ " |
| H | 27 ³ / ₈ " | 29 ⁷ / ₁₆ " |

CLEAN VIEW CIRCULATING KIT (CVCK)

| | HBZDV36 | HBZDV42 |
|---|------------------------------------|------------------------------------|
| A | 59 ⁷ / ₈ " | 63 ¹³ / ₁₆ " |
| B | 38 ⁷ / ₁₆ " | 42 ⁷ / ₁₆ " |
| C | 38 ¹ / ₁₆ " | 42 ¹ / ₁₆ " |
| D | 10 ¹¹ / ₁₆ " | 10 ¹ / ₁₆ " |
| E | 42 ⁵ / ₁₆ " | 45 ¹ / ₈ " |
| F | 12 ³ / ₈ " | 13 ³ / ₄ " |
| G | 17 ⁹ / ₁₆ " | 19 ¹ / ₂ " |
| H | 29 ¹⁵ / ₁₆ " | 31 ¹ / ₈ " |

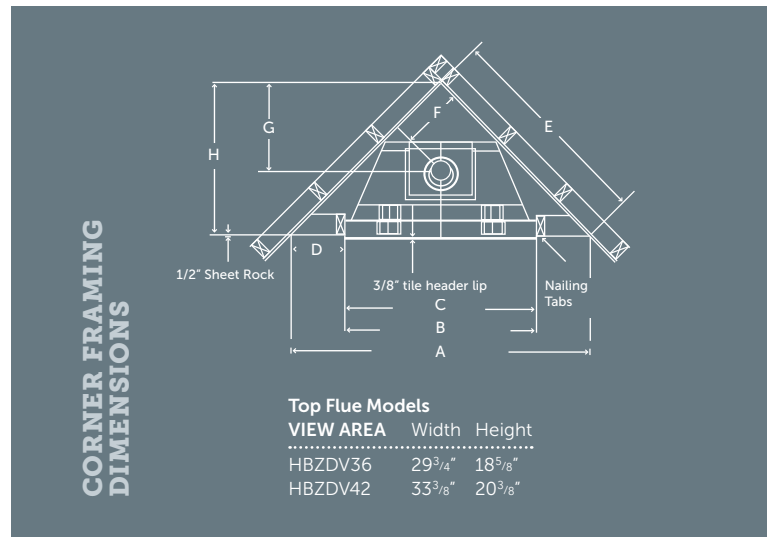

Top Flue Models

| VIEW AREA | Width | Height |
|-----------|----------------------------------|----------------------------------|
| HBZDV36 | 29 ³ / ₄ " | 18 ⁵ / ₈ " |
| HBZDV42 | 33 ³ / ₈ " | 20 ³ / ₈ " |

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Top Flue Models | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|--|------------------------------------|----------------------------------|-----------------------------------|-----------------------------------|------------------------------------|----------------------------------|
| LOUVERS | | | | | | |
| HBZDV36 | 34 ¹³ / ₁₆ " | 35" | 36" | 36 ³ / ₈ " | 16 ⁷ / ₁₆ " | 17" |
| HBZDV42 | 37" | 37 ¹ / ₈ " | 41 ⁷ / ₈ " | 42 ³ / ₈ " | 16 ⁷ / ₁₆ " | 17" |
| CLEAN VIEW CIRCULATING KIT (CVCK) | | | | | | |
| HBZDV36 | 34 ¹¹ / ₁₆ " | 41" | 38 ¹ / ₁₆ " | 38 ⁷ / ₁₆ " | 18 ⁷ / ₈ " | 19 ¹ / ₂ " |
| HBZDV42 | 36 ¹³ / ₁₆ " | 43" | 42 ¹ / ₁₆ " | 42 ⁷ / ₁₆ " | 18 ¹⁵ / ₁₆ " | 19 ¹ / ₂ " |



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



HBZDV4736

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model HBZDV4736N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGF36 Log Set, HB47CVCK Designer Clean View Circulating Kit, and Optional HB47RRH Red Herringbone Brick Liner.

| | | |
|----------------------|-----------------|-----------------|
| Model | HBZDV4736N/NE | HBZDV4736LP/LPE |
| Flue | Top | Top |
| Fuel | Natural | Propane |
| Input Max. | 40,000 BTU | 36,000 BTU |
| Input Min. | 27,000 BTU | 30,000 BTU |
| FE (P.4.1-15) | 60.39% / 61.88% | 53.79% / 54.9% |

Clearance Direct Vent
 home construction
 your best choice for
 throughout your home.

STANDARD FEATURES

- Millivolt or IPI valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Designer Clean View Circulating Kit

No Louvers Required

Grills

Available in Black

Fan Kit

Heat activated with variable speed control

Brick Refractory Liner

Traditional, Herringbone, Red Herringbone

Thermostat


Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control



STYLING




Traditional Brick Liner RLT



Herringbone Brick Liner RLH



Red Herringbone Brick Liner RRH



LogF36

CORNER FRAMING DIMENSIONS

LOUVERED

HBZDV47

| | |
|---|-----------|
| A | 65 1/4" |
| B | 47 3/8" |
| C | 47 1/16" |
| D | 8 15/16" |
| E | 46 1/8" |
| F | 13 15/16" |
| G | 19 11/16" |
| H | 32 3/8" |


CLEAN VIEW CIRCULATING KIT (CVCK)

HBZDV47

| | |
|---|-----------|
| A | 70 3/16" |
| B | 48 3/8" |
| C | 48 1/16" |
| D | 10 7/8" |
| E | 49 5/8" |
| F | 13 15/16" |
| G | 19 11/16" |
| H | 35 1/16" |

| VIEWING AREA | Width | Height |
|--------------|---------|---------|
| HBZDV47 | 39 1/2" | 26 3/8" |

CORNER FRAMING DIMENSIONS

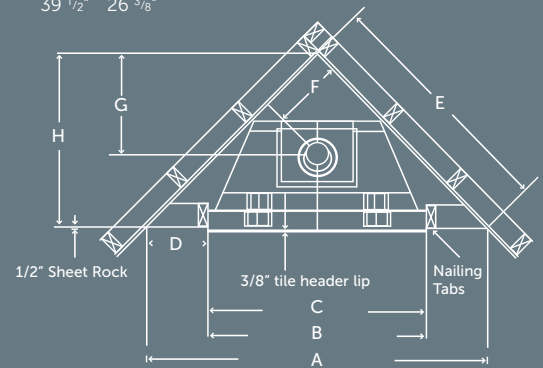

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Top Flue Models | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|--|---------------|----------------|--------------|---------------|--------------|---------------|
| LOUVERS | | | | | | |
| HBZDV47 | 43 1/16" | 43 1/16" | 47 1/16" | 47 3/8" | 19 7/16" | 19 1/2" |
| CLEAN VIEW CIRCULATING KIT (CVCK) | | | | | | |
| HBZDV47 | 49" | 49 1/8" | 48 1/16" | 48 3/8" | 21 15/16" | 22" |



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



VRB46

DIRECT VENT GAS FIREPLACE



VRB46N Zero Clearance Direct Vent Gas Fireplace
 – Natural Gas, ZRB46S1SS Surround Stainless Steel,
 RBCB1 Cannonballs x 14, ZRB46PL Porcelain Liners.



VRB46N Zero Clearance Direct Vent Gas Fireplace
 – Natural Gas, ZRB46PL Porcelain Liners.

STANDARD FEATURES

- Hi/Low Millivolt or IPI valve system will operate during power failures.
- Decorative Bronze Glass
- Mobile Home, Bedroom and Bed Sitting Room approve
- Safety Screen Barrier

OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Wall Mount Thermostat

Standard On/Off or Programmable 5 day (weekday) and 2 day (weekend)

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control


Universal Light Kit

Accent Lighting – Two Lamps

Porcelain Reflective Liner

Cannonballs

Enclosure Grill



Safety Screen Barrier

STYLING



Porcelain Reflective Liner



Multi-coloured Cannonballs



Decorative Ember Glass - Bronze



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

**The ultimate in Zero Clearance Direct Vent Fireplaces
for new home construction or renovation, and your best
choice for installation anywhere throughout your home.**

| | | |
|----------------------|------------------------------|-------------------|
| Model | VRB46N/NE | VRB46LP/LPE |
| Fuel | Natural | Propane |
| Gas Control | Millivolt / IPI | Millivolt / IPI |
| Input Max. | 23,250 BTU | 23,250 BTU |
| Input Min. | 15,750 BTU | 17,750 BTU |
| FE (P.4.1-15) | 67.94% / 70.65% | 70.95% / 73.94% |
| Glass Size | 40 5/8" x 13 7/8" | 40 5/8" x 13 7/8" |
| Venting | 4/7" Kingsman Flex Vent Only | |

**Warm up your favourite room with
the beauty of a Linear Fireplace.**


VENTED CHASE OPTION

When installing a TV above the fireplace, Cool Touch Walls, or reduced Mantel Clearances, the chase of the fireplace must be vented. This can be done by either installing a grill on the front of chase or side grills (for a chase that bumps out in to a room) or be open at the top of the chase. (See illustrations and manual for further information).


Minimum enclosure height for a vented chase is 70" from bottom of fireplace, ventilation of a 105 in² of minimum free air opening is required. Choose between our V46EG Enclosure Grill or Custom Grill (if custom grills are used the louvers cannot slope) or adequate ventilation opening as stated in the manual. Grill or opening must be within 2" of chase top/ceiling.

NOTE: To vent the fireplace chase, removal of vent shields from the fireplace is required.


Framing to ceiling with open front 2-1/4" x 47"




Open chase framing with enclosure min 1-1/4" below ceiling




Framing to ceiling with vents at front and back




Framing to ceiling with front or side vents




Framing to ceiling, minimum enclosure with front or side vents




Minimum enclosure with front or side vents



Minimum enclosure with front and back vents



SURROUND & ENCLOSURE GRILL SIZES

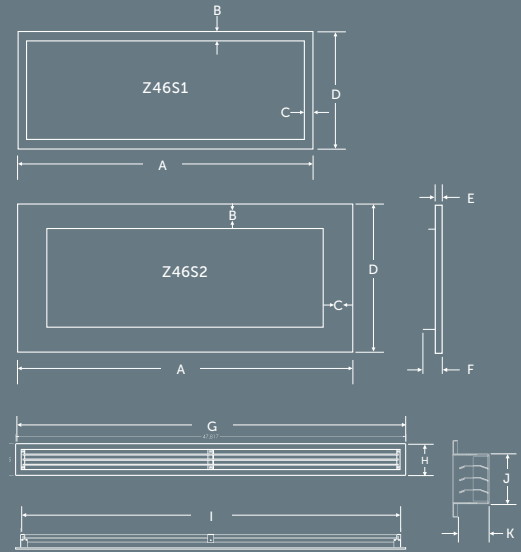

| | Surrounds | | Grill | |
|---|-----------|---------|-------|-----------|
| | Z46S1 | Z46S2 | V46EG | |
| A | 44 5/8" | 50 3/8" | G | 47 13/16" |
| B | 1 1/2" | 4 3/8" | H | 3 13/16" |
| C | 1 1/2" | 4 3/8" | I | 46 9/16" |
| D | 17 1/4" | 22 1/2" | J | 2 1/2" |
| E | 1" | 1" | K | 1 9/16" |
| F | 1 3/4" | 1 3/4" | | |

SPECIFICATIONS (IN.)

FIREPLACE DIMENSIONS

| | Width | Height | Depth |
|-------|---------|---------|---------|
| VRB46 | 46 1/4" | 43 1/2" | 17 7/8" |

FRAMING DIMENSIONS

| | Width | Height | Depth |
|-------|-------|---------|---------|
| VRB46 | 47" | 43 3/4" | 18 1/4" |



1. VRB46N Zero Clearance Direct Vent Gas Fireplace – Natural Gas, ZRB46S2BL Surround Stainless Steel, ZRB46PL Porcelain Liners.
2. VRB46N Zero Clearance Direct Vent Gas Fireplace – Natural Gas, ZRB46S1BL Surround Black, ZRB46PL Porcelain Liners.
3. VRB46N Zero Clearance Direct Vent Gas Fireplace – Natural Gas, ZRB46S1BL Surround Black, RBCB1 Cannonballs x 14, ZRB46PL Porcelain Liners.
4. VRB46N Zero Clearance Direct Vent Gas Fireplace – Natural Gas, ZRB46S1SS Surround Stainless Steel, ZRB46PL Porcelain Liners.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



ZCV39/42

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, Z5GC Glass Media – 1/2" Bronze – 5 lbs (x3), ULK2 Universal Light Kit, ZCV39PL Porcelain Reflective Liner, ZCV39S1PFBL Surround – Picture Frame 4" Wide.

| Model | ZCV39N ZCV39NE | ZCV39LP ZCV39LPE | ZCV39NH ZCV39NHE | ZCV39LPH ZCV39LPHE |
|---------------|---|---------------------|---------------------|-----------------------|
| Fuel | Natural | Propane | Natural | Propane |
| Gas Control | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI |
| Input Max. | 25,000 BTU | 25,000 BTU | 28,000 BTU | 29,000 BTU |
| Input Min. | 16,750 BTU | 20,000 BTU | 19,000 BTU | 23,000 BTU |
| FE (P.4.1-15) | 52.35% / 54.24% | 52.35% / 54.24% | 63.81% / 66.17% | 66.82% / 68.65% |
| Glass Size | 33" W x 28 5/8"H | 33" W x 28 5/8"H | 33" W x 28 5/8"H | 33" W x 28 5/8"H |
| Venting | 4/7" Flex or 4 x 6 5/8 Hard Pipe* or Power Vent | | | |

*Consult the manual for all approved venting.

OPTIONS



Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set - Five Piece, ZCV39RLH Refractory Brick Liner -Herringbone.




Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, RBCB1 Cannonballs, ZCV39PL Porcelain Reflective Liner.

STYLING




LOGF3 Log Set - Five Pieces



Multi-coloured Cannonballs




Decorative Ember Glass - Bronze




Traditional Brick Liner RLT



Herringbone Brick Liner RLH



Red Herringbone Brick Liner RRH




Stacked Brick Liner RLS

CORNER

| | ZCV39 | ZCV42 |
|---|---------|---------|
| A | 39 1/2" | 42 1/2" |
| B | 11 3/4" | 11 3/4" |
| C | 31 1/2" | 33" |
| D | 19" | 20 1/2" |
| E | 43" | 45 1/8" |
| F | 39 1/2" | 41 5/8" |
| G | - | - |
| H | - | - |

FRONT VIEW

| | ZCV39 | ZCV42 |
|---|---------|---------|
| A | 39 3/8" | 42 3/8" |
| B | 24 1/8" | 27 1/4" |
| C | 29 5/8" | 33 3/8" |
| D | 33" | 37 1/8" |
| E | 34 1/2" | 37 3/8" |
| F | 37 3/4" | 40 7/8" |
| G | 3" | 2 1/2" |
| H | 29 3/8" | 32 1/2" |

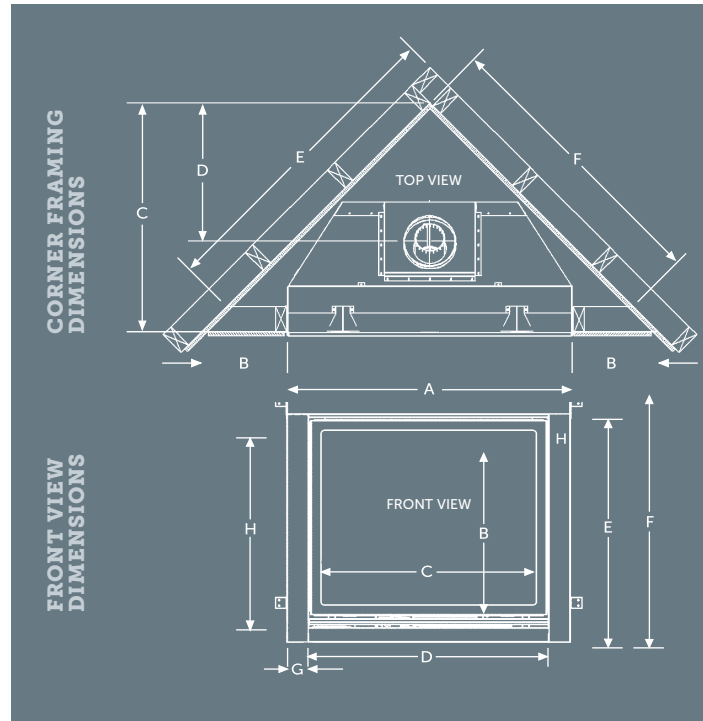

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Top Flue Models | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|-----------------|---------------|----------------|--------------|---------------|--------------|---------------|
| ZCV39 | 37 1/4" | 37 1/8" | 39 3/8" | 39 1/2" | 18 3/8" | 18 1/2" |
| ZCV42 | 40 1/8" | 41" | 42 3/8" | 42 1/2" | 18 3/8" | 18 1/2" |



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



ZCV39/42

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set – Five Piece, ZCV39RLT Refractory Brick Liner – Traditional and ZCV39S1BL Surround – Hearth Mount.

The ultimate in Zero Clearance Direct Vent Fireplaces
for new home construction or renovation, and your best
choice for installation anywhere throughout your home.

| Model | ZCV42N ZCV42NE | ZCV42LP ZCV42LPE | ZCV42NH ZCV42NHE | ZCV42LPH ZCV42LPHE |
|---------------|---|-----------------------|-----------------------|-----------------------|
| Fuel | Natural | Propane | Natural | Propane |
| Gas Control | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI |
| Input Max. | 25,000 BTU | 25,000 BTU | 29,500 BTU | 29,000 BTU |
| Input Min. | 16,500 BTU | 19,500 BTU | 20,000 BTU | 23,000 BTU |
| FE (P.4.1-15) | 52.86% / 54.95% | 52.86% / 54.95% | 64.53% / 66.48% | 66.65% / 68.77% |
| Glass Size | 37 1/8" W x 31 3/4" H | 37 1/8" W x 31 3/4" H | 37 1/8" W x 31 3/4" H | 37 1/8" W x 31 3/4" H |
| Venting | 4/7" Flex or 4 x 6 5/8 Hard Pipe* or Power Vent | | | |

*Consult the manual for all approved venting.

STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Pan burner with Realistic Flame Pattern
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Picture Frame Surrounds

ZCV39 Surrounds

- Hearth Mount 4" Wide (Covers 40 5/8" W x 35" H)
- Picture Frame 4" Wide (Covers 40 5/8" W x 37" H)
- Picture Frame 1 5/8" Wide (Covers 36 1/8" W x 32 1/2" H)

ZCV42 Surrounds

- Hearth Mount 4" Wide (Covers 44 5/8" W x 38 1/8" H)
- Picture Frame 4" Wide (Covers 44 5/8" W x 40 1/8" H)
- Picture Frame 1 5/8" Wide (Covers 40 1/8" W x 35 5/8" H)

Porcelain Reflective Liner

Glass Tray

Ember Glass (Bronze)

Accent Lighting

For use with the Glass Tray

Log Set

LOGF3 Log Set – Five Pieces

Brick Refractory Liner

Traditional, Herringbone, Red Herringbone and Stacked

Thermostat

Wall Mount Thermostat or Programmable Thermostat

Remote Control

Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control.



Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, RBCB1 Cannonballs, ZCV39PL Porcelain Reflective Liner, ZCV39S2PFBL Surround – Picture Frame 1 5/8" Wide.



Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set – Five Piece, ZCV39RLS Refractory Brick Liner – Stacked.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



ZV3600

ZERO CLEARANCE VENTED GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model ZV3600N Zero Clearance Vented Fireplace – Natural Gas, LOGC43 Log Set, Z36RL Brick Liner with Z1GBL Grills – Black.

| | | |
|----------------------|---------------------|-----------------------|
| Model | ZV3600N ZV3600NE | ZV3600LP ZV3600LPE |
| Flue | Top | Top |
| Fuel | Natural | Propane |
| Input BTU | 14,000-21,000 BTU | 17,000-20,000 BTU |
| FE (P.4.1-15) | 35.82% / 37.20% | 41.85% / 43.55% |

STANDARD FEATURES

- Hi/low Millivolt or IPI valve system with variable adjustment of flame and BTU
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Grills

Available in Black

Surrounds Wide

Available in Black

Coverage • ZV3600 – 34 1/2" h x 41 1/8" w

Fan Kit

Heat activated blower with variable speed control

Brick Refractory Liner

Three piece

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat




Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

Log Sets

Choose from our LOGC42 Classic Oak Four Piece, LOGC43 Traditional Oak Four Piece or LOGC44 Burnt Oak Eight Piece

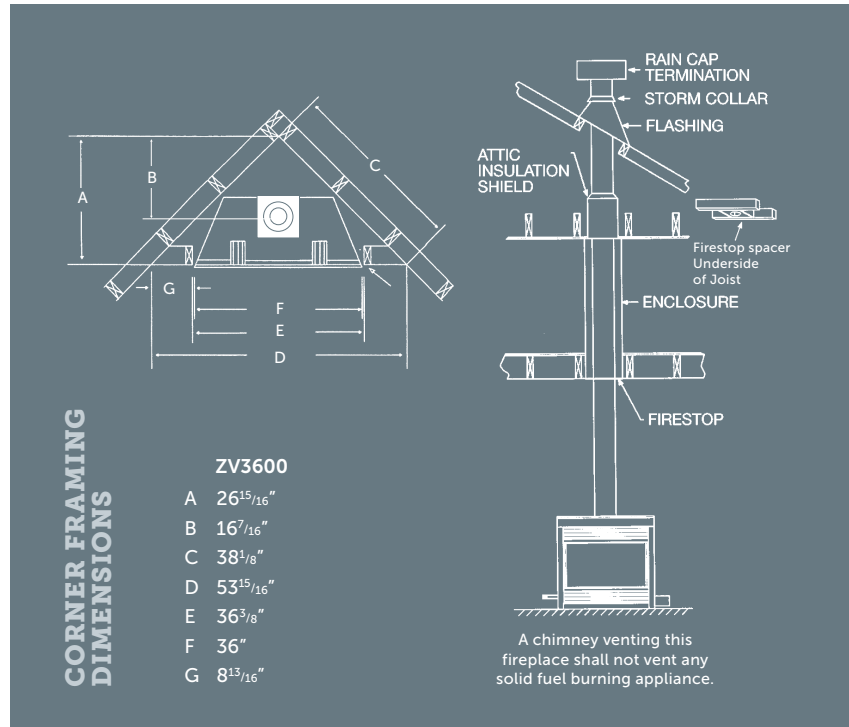

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Models | Height | | Front Width | | Depth | |
|--------|---------|---------|-------------|---------|---------|---------|
| | Actual | Framing | Actual | Framing | Actual | Framing |
| ZV3600 | 33 3/4" | 34" | 36" | 36 3/8" | 15 3/4" | 15 3/8" |



Model ZV3600N Zero Clearance Vented Fireplace – Natural Gas, with LOGC44, Z1GBL Grills, Black, Z36RL Brick Liner.



Model ZV3600N Zero Clearance Vented Fireplace – Natural Gas, with LOGC42, Z1GBL Grills, Black.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



MULTI-SIDED GAS FIREPLACES

Warm up your favorite room with the beauty of a Kingsman Gas Fireplace. Available in natural gas and propane, Kingsman quality fireplaces let you enjoy the beauty of glowing embers and dancing flames.

Create an elegant and warm focal point in your home. Choose from a variety of decorative options, including log sets, to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 40 years of experience.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Direct Vent

| | |
|----------------------|------|
| MDV31/39 CORNER | 2.2 |
| MDV31/39 SEE-THROUGH | 2.4 |
| MDV31/39 PENINSULA | 2.6 |
| MCVST42 SEE-THROUGH | 2.8 |
| MCVP42 PENINSULA | 2.10 |



MDV31/39

DIRECT VENT MULTI-SIDED CORNER FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model MDVL31N Multi-Sided Direct Vent Fireplace in natural gas, LOGC31 Log Set – Seven Piece Cast Split Oak, M30CK Corner Kit, MGCKBL Grill Kit – Black, optional Refractory Liners MDV38RLE – End and MDV38RLS – Side.

There's nothing like the magic of fire to add comfort and beauty to not just one room – but two! Discover its stylish appeal that is perfectly suited as a divider in large multi-purpose rooms such as a great room or lower level.

| | | |
|-------------------------|------------------|--------------------|
| Model | MDV31N / MDV31NE | MDV31LP / MDV31LPE |
| Fuel | Natural | Propane |
| Input Max. | 30,000 BTU | 30,000 BTU |
| Input Min. | 22,500 BTU | 25,000 BTU |
| Glass Type | Tempered | Tempered |
| Bedroom Approved | *Yes | *Yes |
| FE (P.4.1-15) | 60.94% / 63.27% | 60.94% / 63.27% |

*Must be installed with listed thermostat, in Canada. Check local jurisdiction in USA.

STANDARD FEATURES

- Hi/low Millivolt or IPI valve with variable adjustment of flame and BTU
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- A triple burner with seven piece cast split oak log set with glowing ember bed and decorative ash bed
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Grills

Available in Black

Surround Wide (See Through Louvered only)

Available in Black

Fan Kit

Thermostatically controlled for automatic On/Off operation and variable speed control

Brick Refractory Liners

End Panel

Thermostat

Wall Mount Millivolt or Programmable Thermostat

Remote Control


On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

Designer Clean View Circulating Kit

No louvers required
Two Clean views required for installation

Clean View Framing (See Through Only)

42 1/2" H x 46 1/8" W x 25 5/8" D

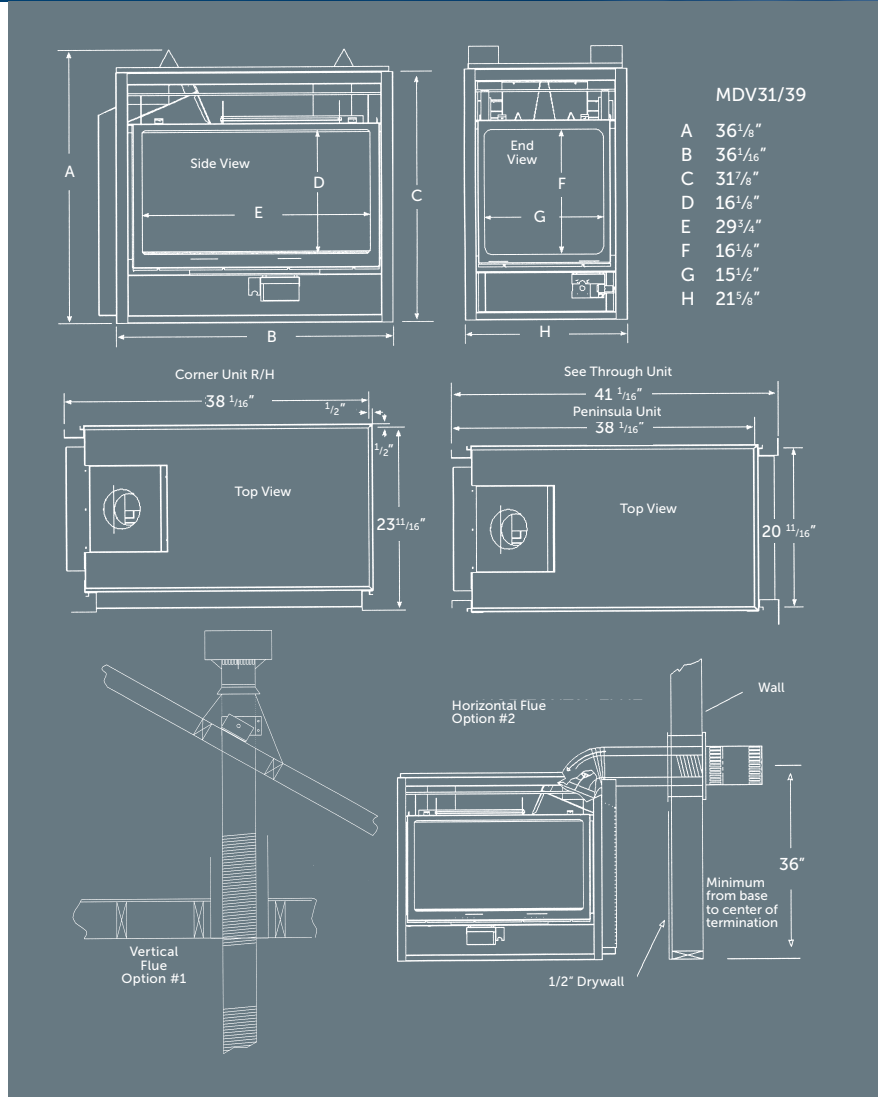

UNIT AND FRAMING SPECIFICATIONS (IN.)

| LOUVERED MODEL | Height Framing | Width Framing | Depth Framing |
|----------------|----------------|---------------|---------------|
| CORNER | 37" | 38 1/8" | 23 3/4" |
| PENINSULA | 37" | 38 1/8" | 20 5/8" |
| SEE-THROUGH | 37" | 41 1/8" | 20 5/8" |

Minimum 42" height for combustible enclosure, with insulation sleeve.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



MDV31/39

DIRECT VENT MULTI-SIDED SEE-THROUGH FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

This unit illustrated is a MDVR31N Multi-Sided Direct Vent Fireplace in natural gas, LOGC31 Log Set – Seven Piece Cast Split Oak, M30SK See Through Kit, Z36CVCK Designer Clean View Circulating Kit (2).

There's nothing like the magic of fire to add comfort and beauty to not just one room – but two! Discover its stylish appeal that is perfectly suited as a divider in large multi-purpose rooms such as a great room or lower level.

| | | |
|-------------------------|------------------|--------------------|
| Model | MDV31N / MDV31NE | MDV31LP / MDV31LPE |
| Fuel | Natural | Propane |
| Input Max. | 30,000 BTU | 30,000 BTU |
| Input Min. | 22,500 BTU | 25,000 BTU |
| Glass Type | Tempered | Tempered |
| Bedroom Approved | *Yes | *Yes |
| FE (P.4.1-15) | 60.94% / 63.27% | 60.94% / 63.27% |

*Must be installed with listed thermostat, in Canada. Check local jurisdiction in USA.

STANDARD FEATURES

- Hi/low Millivolt or IPI valve with variable adjustment of flame and BTU
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- A triple burner with seven piece cast split oak log set with glowing ember bed and decorative ash bed
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Grills

Available in Black

Surround Wide (See Through Louvered only)

Available in Black

Fan Kit

Thermostatically controlled for automatic On/Off operation and variable speed control

Brick Refractory Liners

End Panel

Thermostat

Wall Mount Millivolt or Programmable Thermostat

Remote Control


On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

Designer Clean View Circulating Kit

No louvers required
Two Clean views required for installation

Clean View Framing (See Through Only)

42 1/2" H x 46 1/8" W x 25 5/8" D

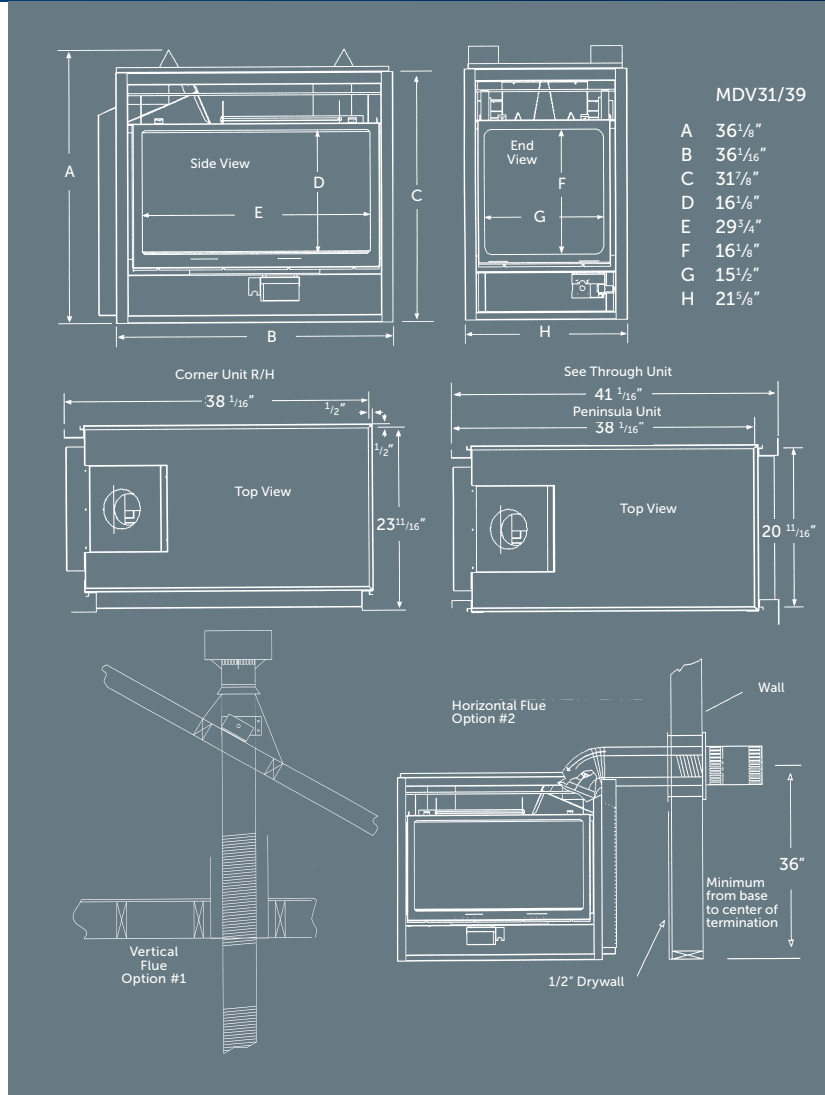

UNIT AND FRAMING SPECIFICATIONS (IN.)

| LOUVERED MODEL | Height Framing | Width Framing | Depth Framing |
|----------------|----------------|---------------|---------------|
| CORNER | 37" | 38 1/8" | 23 3/4" |
| PENINSULA | 37" | 38 1/8" | 20 5/8" |
| SEE-THROUGH | 37" | 41 1/8" | 20 5/8" |

Minimum 42" height for combustible enclosure, with insulation sleeve.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



MDV31/39

DIRECT VENT MULTI-SIDED PENINSULA FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model MDVR31N Multi-Sided Direct Vent Fireplace in natural gas, LOGC31 Log Set – Seven Piece Cast Split Oak, M30PK Peninsula Kit, MGPKBL Grill Kit – Black, optional MDV38RLE Refractory Liner.

There's nothing like the magic of fire to add comfort and beauty to not just one room – but two! Discover its stylish appeal that is perfectly suited as a divider in large multi-purpose rooms such as a great room or lower level.

| | | |
|-------------------------|------------------|--------------------|
| Model | MDV31N / MDV31NE | MDV31LP / MDV31LPE |
| Fuel | Natural | Propane |
| Input Max. | 30,000 BTU | 30,000 BTU |
| Input Min. | 22,500 BTU | 25,000 BTU |
| Glass Type | Tempered | Tempered |
| Bedroom Approved | *Yes | *Yes |
| FE (P.4.1-15) | 60.94% / 63.27% | 60.94% / 63.27% |

*Must be installed with listed thermostat, in Canada. Check local jurisdiction in USA.

STANDARD FEATURES

- Hi/low Millivolt or IPI valve with variable adjustment of flame and BTU
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- A triple burner with seven piece cast split oak log set with glowing ember bed and decorative ash bed
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Grills

Available in Black

Surround Wide (See Through Louvered only)

Available in Black

Fan Kit

Thermostatically controlled for automatic On/Off operation and variable speed control

Brick Refractory Liners

End Panel

Thermostat

Wall Mount Millivolt or Programmable Thermostat

Remote Control


On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

Designer Clean View Circulating Kit

No louvers required
Two Clean views required for installation

Clean View Framing (See Through Only)

42 1/2" H x 46 1/8" W x 25 5/8" D

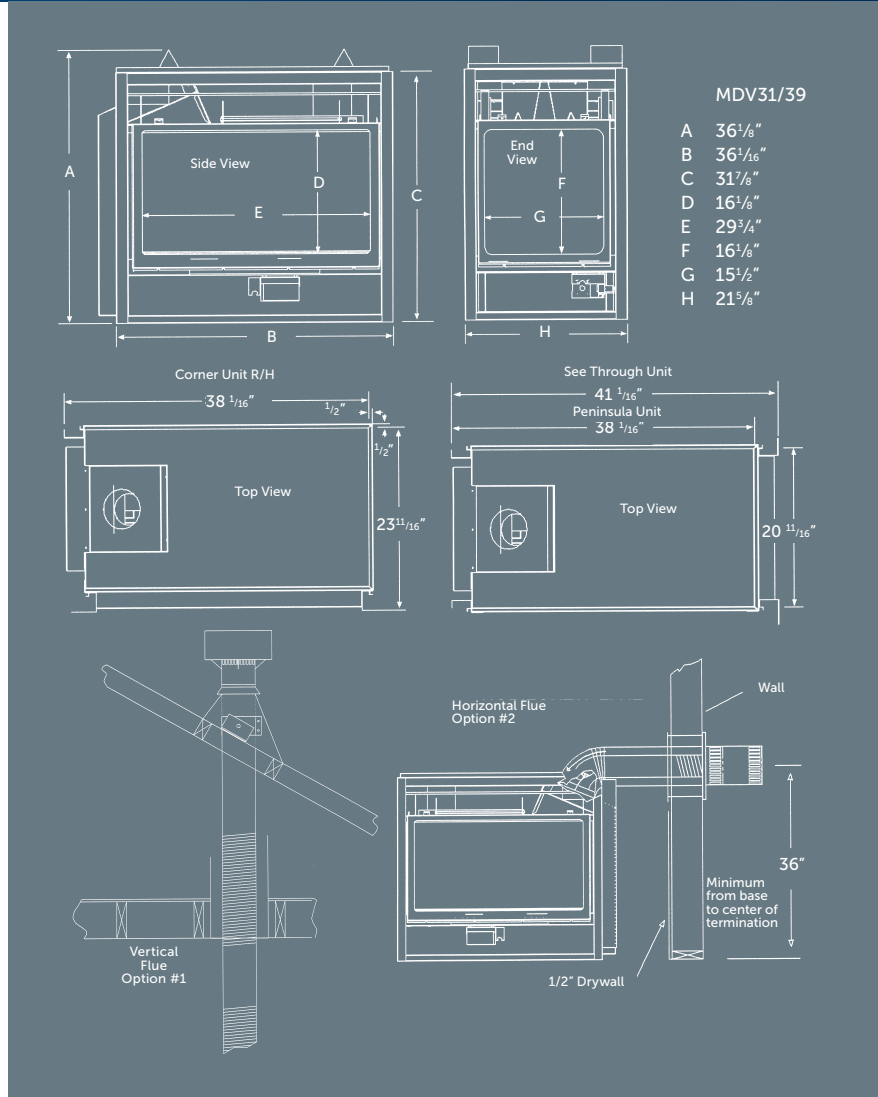

UNIT AND FRAMING SPECIFICATIONS (IN.)

| LOUVERED MODEL | Height Framing | Width Framing | Depth Framing |
|----------------|----------------|---------------|---------------|
| CORNER | 37" | 38 1/8" | 23 3/4" |
| PENINSULA | 37" | 38 1/8" | 20 5/8" |
| SEE-THROUGH | 37" | 41 1/8" | 20 5/8" |

Minimum 42" height for combustible enclosure, with insulation sleeve.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



MCVST42

ZERO CLEARANCE **DIRECT VENT** SEE-THROUGH GAS FIREPLACE

Make the most of the best view in the house with our line of Zero Clearance Direct Vent See-Through Gas Fireplaces. Ideally suited for new construction or renovations anywhere in your home.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model MCVST42NH See-Through Fireplace – Natural Gas, M42LG Log Grate, M42LOG4 Oak Log Set, MST42RLT Traditional Brick Liner.

STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Safety Screen Barrier*

OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Surrounds

- Hearth Mount 4" Wide (Covers 44 5/8" W x 38 1/8" H)
- Picture Frame 4" Wide (Covers 44 5/8" W x 40 1/8" H)
- Picture Frame 1 5/8" Wide (Covers 40 1/8" W x 35 5/8" H)

Porcelain Reflective Liner

Glass Tray

For use with Bronze Glass Media, Cannonballs, and Driftwood Log Set

Accent Lighting

For use with the Glass Tray

Log Set

Oak (8 piece) Set, and Driftwood (6 Piece) Set.

Brick Refractory Liner

Traditional

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat



Remote Control

Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control.

FRONT VIEW TOP VIEW END VIEW

| | | | |
|---|------------------------------------|----------------------------------|----------------------------------|
| A | 43 ¹ / ₁₆ " | - | - |
| B | 37 ¹ / ₁₆ " | - | - |
| C | 33 ¹¹ / ₁₆ " | - | - |
| D | 27 ³ / ₁₆ " | - | - |
| E | 2 ¹ / ₂ " | - | - |
| F | 32 ¹ / ₂ " | - | - |
| G | 2" | - | - |
| H | 3 ¹ / ₈ " | - | - |
| I | 3 ¹ / ₂ " | - | - |
| J | 7 ¹ / ₄ " | - | - |
| K | - | 23 ³ / ₈ " | - |
| L | - | 24 ¹ / ₄ " | - |
| M | - | - | 24 ¹ / ₄ " |
| N | - | - | 51 ¹ / ₄ " |
| O | - | - | 42 ⁷ / ₈ " |


| | | | | |
|----------------------|-----------------|-----------------|-----------------|-------------------|
| Model | MCVST42N / NE | MCVST42LP / LPE | MCVST42NH / NHE | MCVST42LPH / LPHE |
| Fuel | Natural | Propane | Natural | Propane |
| Gas Control | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI |
| Input Max. | 30,250 BTU | 29,000 BTU | 31,000 BTU | 29,250 BTU |
| Input Min. | 20,750 BTU | 23,000 BTU | 21,000 BTU | 23,000 BTU |
| FE (P.4.1-15) | 57.56% / 59.55% | 58.56% / 55.32% | 66.45% / 68.58% | 67.88% / 70.36% |
| Glass Type | Tempered | Tempered | Ceramic | Ceramic |

OPTIONS



Model MCVST42NH See-Through Fireplace – Natural Gas, ZCV42S2PFBL Surround Picture Frame 1 5/8" Wide, MST42GT Glass Tray, ZG5C Glass Media – Bronze x (5), RBCB1 Cannonballs, MST42PL Porcelain Liner.

UNIT DIMENSIONS AND SPECIFICATIONS

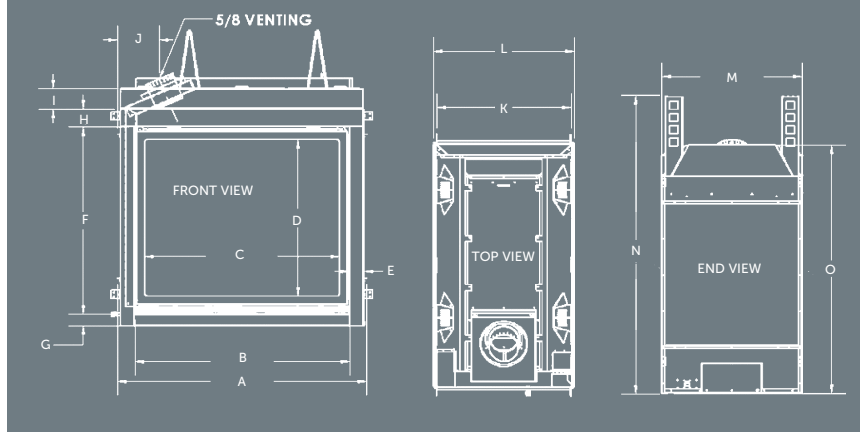

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Top Flue Models | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|-----------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------|----------------------------------|-----------------------------------|
| MCVST42 | 51 ¹ / ₄ " | 51 ³ / ₈ " | 43 ¹ / ₁₆ " | 43 ¹ / ₈ " | 24 ¹ / ₄ " | 23 ¹ / ₁₆ " |



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



MCVP42

ZERO CLEARANCE **DIRECT VENT** PENINSULA GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model MCV42NH Peninsula Fireplace – Natural Gas, M42LG Log Grate, M42LOG4 Oak Log Set, MP42RLT Traditional Brick Liner.

Make the most of the best view in the house with our line of Zero Clearance Direct Vent Peninsula Gas Fireplaces. Ideally suited for new construction or renovations anywhere in your home.

| Model | MCVP42N/NE | MCVP42LP/LPE | MCVP42NH/NHE | MCVP42LPH/LPHE |
|---------------|-----------------|-----------------|-----------------|-----------------|
| Fuel | Natural | Propane | Natural | Propane |
| Gas Control | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI | Millivolt / IPI |
| Input Max. | 30,250 BTU | 28,500 BTU | 31,250 BTU | 29,000 BTU |
| Input Min. | 21,000 BTU | 23,000 BTU | 21,250 BTU | 23,000 BTU |
| FE (P.4.1-15) | 53% / 54.63% | 53.82% / 55.32% | 64.55% / 66.49% | 65.66% / 67.42% |
| Glass Type | Tempered | Tempered | Ceramic | Ceramic |

STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

Porcelain Reflective Liner

Brick Refractory Liner

Traditional

Glass Tray

For use with Bronze Glass Media, Cannonballs, and Driftwood Log Set

Accent Lighting

For use with the Glass Tray

Log Set

Oak (8 piece) Set, and Driftwood (6 Piece) Set

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat



Remote Control


Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and light control.

| FRONT VIEW | SIDE VIEW | TOP VIEW | |
|------------|------------------------------------|----------------------------------|----------------------------------|
| A | 43 ¹ / ₁₆ " | - | |
| B | 33 ¹¹ / ₁₆ " | - | |
| C | 20 ⁵ / ₈ " | - | |
| D | 23 ¹⁵ / ₁₆ " | - | |
| E | 5 ³ / ₁₆ " | - | |
| F | 8" | - | |
| G | 1" | - | |
| H | 7 ³ / ₈ " | - | |
| I | 3" | - | |
| J | - | 42 ¹ / ₄ " | |
| K | - | 12 ¹ / ₄ " | |
| L | - | 20 ⁵ / ₈ " | |
| M | - | 16" | |
| N | - | 19" | |
| O | - | 24 ¹ / ₄ " | |
| P | - | - | 23 ¹ / ₄ " |
| Q | - | - | 24 ¹ / ₂ " |

OPTIONS



Model MCVP42NH Peninsula Fireplace – Natural Gas, MP42GT Glass Tray, ZG5C Glass Media – Bronze x (5), MP42PL Porcelain Reflective Liner.

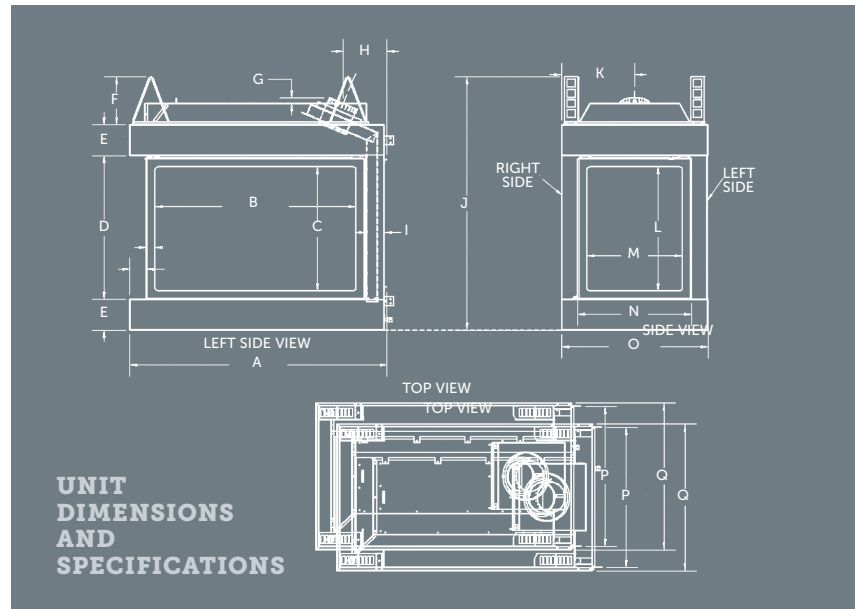

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Top Flue Models | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|-----------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------|----------------------------------|-----------------------------------|
| MCVP42 | 42 ¹ / ₄ " | 42 ³ / ₈ " | 43 ¹ / ₁₆ " | 42 ¹ / ₂ " | 24 ¹ / ₂ " | 23 ⁵ / ₁₆ " |



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



FREESTANDING STOVES

Warm up your favorite room with the beauty of a Kingsman Gas Stove. Available in natural gas and propane, Kingsman quality stoves let you enjoy the beauty of glowing embers and dancing flames.

Create an elegant and warm focal point in your home. Choose from a variety of decorative options, including log sets, to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 40 years of experience.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Direct Vent

FDV451 3.2

FDV350 3.4

Vent-Free

FVF350 3.6



FDV451

FREE STANDING **DIRECT VENT** GAS STOVE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model FDV451N Free Standing Direct Vent Gas Stove – Natural Gas, F450FBL Door Front – Charcoal with Flat Black Posts, F451SDSBL Side Doors with Flat Black Frame and Charcoal Solid Panel, LOGF451 Oak Log Set, F451RLT Traditional Brick Liner, F45FK Fan Kit.

| | | |
|----------------------|-----------------|-----------------|
| Model | FDV451N / NE | FDV451LP / LPE |
| Gas Control | Millivolt / IPI | Millivolt / IPI |
| Fuel | Natural | Propane |
| Input Low | 34,500 BTU | 31,000 BTU |
| Input High | 23,750 BTU | 24,500 BTU |
| FE (P.4.1-15) | 65.89% / 67.72% | 72.14% / 74.06% |

A SAFE AND EFFICIENT HEATING APPLIANCE WITH THE CONVENIENCE OF GAS

STANDARD FEATURES*

- Millivolt or IPI valve system allows operation during a power failure with Hi-Low heat and flame adjustment
- Dual burner system, with Realistic Flame Pattern
- Heat radiating ceramic glass
- Mobile home approved – (Direct Vent Model Only)
- Approved for installation in a bedroom or bed sitting room
- Safety Screen Barrier

OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Front Color Choices

Charcoal with Accent colors of Flat Black or Stainless Steel

Side Panels

Charcoal Panels with Trim colors of Flat Black or Stainless Steel

Log Sets

Oak

Brick Refractory Liner

Traditional or Herringbone

Reflective Porcelain Liner

Media Types

Bronze Glass or Cannonballs

Thermostat


Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control


On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control



SIZING AND DIMENSIONS

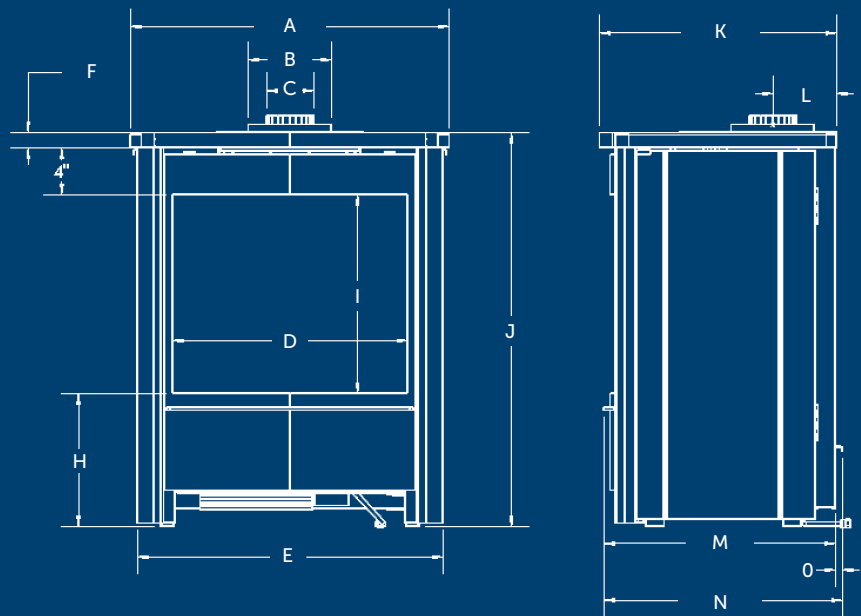

| | | | |
|---|----------|---|-----------|
| A | 27 1/8" | I | 16 15/16" |
| B | 7" | J | 33 1/2" |
| C | 4" | K | 20 1/8" |
| D | 20" | L | 5 3/8" |
| E | 26" | M | 19 3/4" |
| F | 1 1/4" | N | 20 5/16" |
| G | 4" | O | 9/16" |
| H | 11 5/16" | P | 20 5/8" |

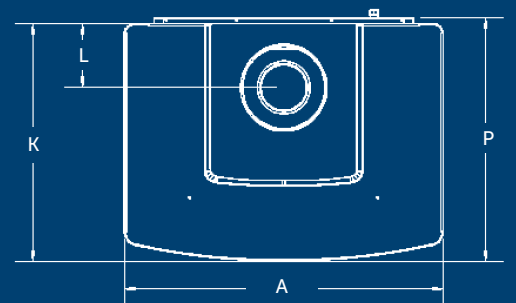

MINIMUM CLEARANCES TO COMBUSTIBLES:

- 36" from front of unit
- 15 1/2" from side of unit
- 2 1/2" from back of unit

ALCOVE INSTALLATION:

- 48" depth (max.)
- 71 1/2" height (min.)
- 58" width (min.)



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



FDV350

DIRECT VENT FREE-STANDING GAS STOVE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model FDV350N Direct Vent Natural Gas Stove, F35DB Black Door Frame with Ceramic Glass, LOGF35 Fibre Oak Log Set with embers.

| Model | FDV350N | FDV350LP |
|---------------|------------|------------|
| Fuel | Natural | Propane |
| Input Max | 37,000 BTU | 35,000 BTU |
| Input Min. | 29,000 BTU | 27,000 BTU |
| FE (P.4.1-15) | 66.63% | 69.33% |

Direct Vent Free Standing Stove; a Safe and Efficient Heating Appliance with the Convenience of Gas. Your best choice for installation anywhere throughout your home.

STANDARD FEATURES

- Millivolt Valve with Hi-Low heat and flame adjustment and allows operation during a power failure
- Dual burner system, with realistic flame pattern
- Heat radiating ceramic glass with panoramic view from three sides
- Mobile home approved
- Approved for installation in a bedroom or bed sitting room
- Black Louver
- Fibre Oak Log Set with Embers*

OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Brick Refractory Liner

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating



MINIMUM CLEARANCES TO COMBUSTIBLES


- 12" from side of unit
- 3" from back of unit
- 3" from side of unit in corner

ALCOVE INSTALLATION

- 30" depth (max.)
- 55½" height (max.)
- 52½" width (max.)

DIMENSIONS AND SIZING

| | | |
|---|-----------------------------------|--|
| A | 30 ³ / ₈ " | With a direct vent appliance you can vent either through the side wall above the unit or straight up through the roof. |
| B | 27 ⁵ / ₁₆ " | |
| C | 19 ¹ / ₁₆ " | |
| D | 19 ¹ / ₁₆ " | |
| E | 4" dia. | |
| F | 7 ¹ / ₂ " | |
| G | 7" dia. | |

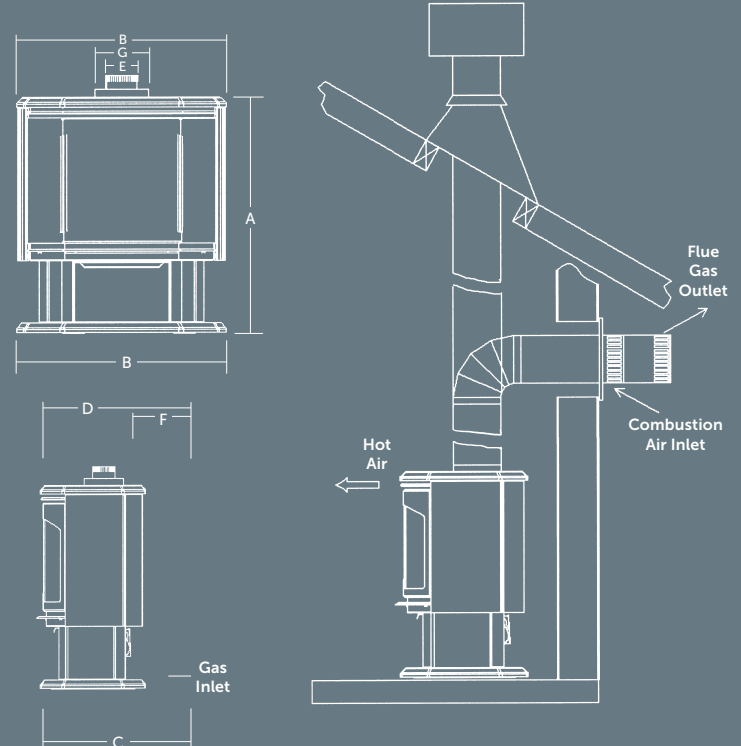

Safety Screen Barrier



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



FVF350

VENT-FREE FREE STANDING GAS STOVE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model FVF350 Vent Free Stove, FVFB350MVN Natural Gas Millivolt Burner, FVF350DB Black Door, F35LG Gold Louver, LOGF35 Fibre Oak Log Set.

| Model | FVFB350MVN | FVFB350MVP |
|------------|------------|------------|
| Input Low | 25,000 BTU | 27,000 BTU |
| Input High | 40,000 BTU | 37,000 BTU |
| Valve Type | Millivolt | Millivolt |
| Efficiency | 99.9% | 99.9% |

The ultimate in Vent-Free Free Standing Gas Stoves for new home construction or renovation, and your best choice for installation anywhere throughout your home.

STANDARD FEATURES

- Millivolt Valve with Hi-Low heat and flame adjustment and allows operation during a power failure
- Dual burner system, with realistic flame pattern
- Black Arch Door with Fixed Mesh Screen
- Equipped with 100% safety shut-off feature (ODS) Oxygen Depletion Sensor
- Black Louver
- Fibre Oak Log Set with glowing embers*
- No chimney or vent required, maximizes location flexibility
- Safety Screen Barrier

OPTIONAL FEATURES

Fan Kit

Heat activated blower with variable speed control

Louver

Gold (24 carat) Louver

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

On/Off, Thermostat or Hi/Lo On/Off




Fibre Oak Log Set



DIMENSIONS & SIZING

| | |
|---|-----------------------------------|
| A | 30 ³ / ₈ " |
| B | 27 ⁵ / ₁₆ " |
| C | 19 ¹ / ₁₆ " |
| D | 19 ¹ / ₁₆ " |

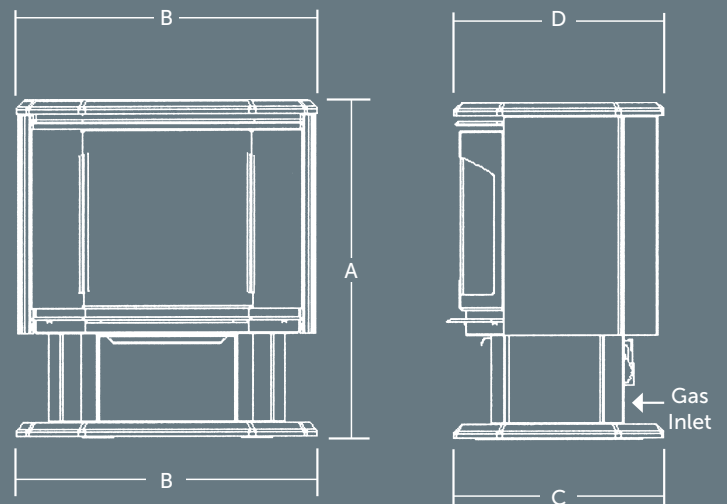

MINIMUM CLEARANCES TO COMBUSTIBLES

- 12" from side of unit
- 3" from back of unit
- 3" from side of unit in corner
- 41" from top of unit



GAS FIREPLACE INSERTS

Inserts are complete units that fit into existing wood burning fireplaces. They require no additions such as glass doors, and consist of a combustion chamber with gas logs. Inserts are available as a vented or direct vent appliance, and they utilize the existing chimney by using a flexible gas liner(s).



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Direct Vent

IDV33/IDV43 4.2

IDV26 4.6

Vented

VFI25 4.8



IDV33/IDV43

DIRECT VENT GAS FIREPLACE INSERT



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model IDV33N Direct Vent Fireplace Insert – Natural Gas, LOGF35 Log Set – Fibre Split Oak, I33CV3BL Clean View Kit – Black.

Convert your wood burning fireplace to gas, for a new standard of warmth, beauty, safety and convenience.

STANDARD FEATURES

- Dual Burner with glowing embers
- Millivolt or IPI valve system allows operation during power failure with Hi-Low heat and flame adjustment
- Decorative Ash Bed
- Ceramic Glass
- On/Off Rocker switch
- Heat activated blower with variable speed control
- Bedroom and bed sitting room approval
- Mobile home, bedroom and bed sitting room approval
- Safety Screen Barrier

OPTIONAL FEATURES

Clean View Kit

Black (I33CV/I43CV1 Pewter and Copper Vein available)

Front Frame

Required for CV5 Cleanview

Surrounds for Clean View

Black (I33SR2/I43S4432 Pewter and Copper Vein available)

Surround Picture Frame for Clean View

Black

Louver Kit

Black Grills

Surrounds for Louver Kit

Black

Porcelain Reflective Liner

Brick Liner

Traditional and Herringbone (IDV43 only)

Log Set

Fibre Split Oak

Glass Tray

Ember Glass (Bronze)

Wall Mount Thermostat

Standard On/Off or Programmable

Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating



Traditional
Brick Liner RLT



Herringbone
Brick Liner RLH



Safety Screen Barrier



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



IDV33/43

DIRECT VENT GAS FIREPLACE INSERT



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model IDV43N Direct Vent Insert – Natural Gas, I43CV1BL Clean View – Black, RSP10 Glass Tray Support with Bronze Glass, IDV36PRL Porcelain Reflective Liner.

| Model | IDV33N / IDV33NE | IDV33LP / IDV33LPE | IDV43N / IDV43NE | IDV43LP / IDV43LPE |
|---------------|------------------|--------------------|------------------|--------------------|
| Fuel | NATURAL | PROPANE | NATURAL | PROPANE |
| Input Max. | 31,000 BTU | 28,500 BTU | 34,250 BTU | 30,000 BTU |
| Input Min. | 20,900 BTU | 23,100 BTU | 24,000 BTU | 22,840 BTU |
| FE (P.4.1-15) | 50.43% / 51.74% | 56.26% / 58.34% | 60.18% / 61.7% | 60.2% / 61.85% |
| Flue Sizes | 3/3" | 3/3" | 4/3" | 4/3" |



MINIMUM FIREPLACE OPENING (IN.)

| Model | Width | Height | Depth | Model | Width | Height | Depth |
|-------|---------|---------|---------|-------|---------|---------|---------|
| IDV33 | 26 1/4" | 21 3/8" | 14 3/8" | IDV43 | 30 3/4" | 25 5/8" | 14 3/4" |

LOUVER KIT AND SURROUND SIZES (IN.)

| IDV33 | Width | Height | IDV43 | Width | Height |
|---------------------|---------|---------|--------------------|-------|---------|
| I33LK (Louver Kit) | 34 1/2" | 24 3/8" | I43LK (Louver Kit) | 39" | 28 3/4" |
| I33S3426 (Surround) | 34 1/2" | 26 1/2" | I43LKS1BL | 39" | 31 3/4" |
| I33S4028 (Surround) | 40" | 28 1/8" | I43LKS2BL | 44" | 32 3/8" |
| I33S4430 (Surround) | 44" | 30 5/8" | I43US4736BL | 47" | 36" |
| I33S4535 (Surround) | 45" | 35" | | | |

CLEAN VIEW AND SURROUND SIZES (IN.)

Minimum Fireplace Opening: 26 3/8" W x 21 3/8" H x 14 3/8" D

| IDV33 INSERT | Width | Height | Depth |
|-------------------------------------|---------|--------------------|---------|
| I33CV (Clean View)** | 33 3/8" | 23" / 24 5/16" | 2 1/2" |
| I33CV3 (Clean View)** | 33 3/8" | 23 1/8" / 24 5/16" | 4 1/8" |
| I33SR2 (Surround) | 39" | 27" | 5/8" |
| I33SRP3 (Surround Picture Frame) | 41" | 31" | 5/8" |
| I33USR4 (Surround Universal) | 45" | 35" | 1 1/16" |
| I33CV5 (Clean View) | 37 1/8" | 25 1/4" | 2 5/16" |
| I33BT1 (Back Trim Surround)* | 39" | 26" | 1 1/4" |
| I33USR4 (Surround Universal) | 45" | 35" | 1 1/16" |
| I33CVPF5 (Clean View Picture Frame) | 37 1/8" | 25 1/4" | 2 5/16" |
| I33BTPF (Back Trim Surround)* | 41" | 31" | 1 1/4" |

* Back Trim Surround required if the fireplace opening is smaller than 29 3/8" W x 22 3/8" H x 16 1/8" D.
 Note: When Using I33CV5/I33CVPF5 Clean View a Door Frame is Required.

**CV and CV3 have a tapered profile.

Minimum Fireplace Opening: 29 3/8" W x 22 3/8" H x 16 1/8" D

| IDV33 INSERT | Width | Height | Depth |
|-------------------------------------|---------|---------|---------|
| I33CV5 (Clean View) | 37 1/8" | 25 1/4" | 2 5/16" |
| I33SR2 (Surround) | 39" | 27" | 5/8" |
| I33USR4 (Surround Universal) | 45" | 34" | 1 1/16" |
| I33CVPF5 (Clean View Picture Frame) | 37 1/8" | 25 1/4" | 2 1/4" |
| I33SRP3 (Surround Picture Frame) | 41" | 31" | 5/8" |

Note: When Using I33CV5/I33CVPF5 Clean View a Door Frame is Required.

Minimum Fireplace Opening: 30 3/4" W x 25 5/8" H x 14 3/4" D

| IDV43 INSERT | Width | Height | Depth |
|----------------------------------|----------|-------------------|---------|
| I43CV1 (Clean View)** | 37 1/2" | 27 1/4" / 28 3/4" | 2 1/2" |
| I43CV3 (Clean View)** | 37 3/4" | 27 3/8" / 28 3/4" | 4 1/8" |
| I43S4432 (Surround) | 44" | 32" | 5/8" |
| I43US4736 (Surround Universal) | 47" | 36" | 1 1/16" |
| I43SPF1 (Surround Picture Frame) | 43 1/2" | 33 3/8" | 1/2" |
| I43CV5 (Clean View) | 41 3/16" | 29 1/16" | 2 5/16" |
| I43BT4230 (Back Trim Surround)* | 42" | 30" | 1 1/4" |
| I43BT4432 (Back Trim Surround)* | 44" | 32" | 1 1/4" |
| I43US4736 (Surround Universal) | 47" | 36" | 1 1/16" |

* Back Trim Surround required if the fireplace opening is smaller than 33 1/2" W x 26 5/8" H x 16 5/8" D.
 Note: When Using I43CV5/I43CVPF5 Clean View a Door Frame is Required.

**CV1 and CV3 have a tapered profile.

Minimum Fireplace Opening: 33 1/2" W x 26 5/8" H x 16 5/8" D

| IDV43 INSERT | Width | Height | Depth |
|--------------------------------|----------|----------|---------|
| I43CV5 (Clean View) | 41 3/16" | 29 1/16" | 2 1/4" |
| I43S4432 (Surround) | 44" | 32" | 5/8" |
| I43US4736 (Surround Universal) | 47" | 36" | 1 1/16" |

Note: When Using I43CV5 Clean View a Door Frame is Required.

1. Model IDV33LP Direct Vent Fireplace Insert – Propane, LOGF35 Split Fiber Oak Log Set, I33CVCV Clean View Kit – Copper Vein, I33SS1CV Surround for Clean View – Copper Vein, IDV33RL Refractory Brick Liner.
2. Model IDV33LP Direct Vent Fireplace Insert – Propane, LOGF35 Split Fiber Oak Log Set – I33CVPW Clean View Kit – Pewter, I33SS1PW Surround for Clean View – Pewter, IDV33RL Refractory Brick Liner.
3. Model IDV43N Direct Vent Insert – Natural Gas, I43LK Louver Kit, LOGF36 Log Set, IDV36RLT Refractory Brick Liner – Traditional.





IDV26

DIRECT VENT GAS FIREPLACE INSERT



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model IDV26N Direct Vent Insert – Natural Gas, LOGF27 Log Set, I26CV3BL Clean View – Black, IDV26RL Brick Liner.

| | | |
|----------------------|------------------|--------------------|
| Model | IDV26N / IDV26NE | IDV26LP / IDV26LPE |
| Fuel | Natural | Propane |
| Input Max. | 30,000 BTU | 30,000 BTU |
| Input Min. | 21,000 BTU | 25,000 BTU |
| FE (P.4.1-15) | 58.82% / 60.27% | 58.82% / 60.27% |

Convert your wood burning fireplace to gas, for a new standard of warmth, beauty, safety and convenience.

STANDARD FEATURES

- Dual Burner with glowing embers
- Hi/low Millivolt or IPI valve system, will operate during power failures
- Matchless Piezo Ignition
- Decorative Ash Bed
- Ceramic Glass (Heat Radiating)
- On/Off Rocker switch
- Heat activated blower with ariable speed control
- Safety Screen Barrier



Safety Screen Barrier

OPTIONAL FEATURES

- Log Set**
Fibre Split Oak
- Glass Tray with Bronze Glass**
- Clean View Kit**
Black
- Surrounds for Clean View**
Black
- Surround Picture Frame for Clean View**
Black
- Liners**
Porcelain Reflective Liner or Traditional Brick
- Wall Mount Thermostat**
Standard On/Off or Programmable
- Remote Control**
On/Off, Thermostat
On/Off, Thermostat
On/Off modulating



CLEAN VIEW AND SURROUND SIZES (IN.)

| IDV26 | Width | Height | Depth |
|----------|----------------------------------|--|---------------------------------|
| I26CV1 | 35 ⁵ / ₈ " | 22 ³ / ₄ " | 1 ³ / ₄ " |
| I26CV2 | 44 ⁵ / ₈ " | 26 ⁵ / ₈ " | 1 ³ / ₄ " |
| I26CVPF1 | 35 ⁵ / ₈ " | 25 ⁷ / ₈ " | 1 ³ / ₄ " |
| I26CVPF2 | 44 ⁷ / ₈ " | 33 ¹ / ₂ " | 1 ³ / ₄ " |
| I26S1 | 42" | 27 ¹ / ₂ " | |
| I26SU | 47 ¹ / ₂ " | 35 ⁵ / ₈ " / 28 ⁵ / ₈ "* | |
| I26SU | 39 ³ / ₈ " | 29 ³ / ₄ " | |
| I26CV3 | 35 ⁵ / ₈ " | 22 ³ / ₄ " | 3 ¹ / ₂ " |

*Dimension as a three sided surround

MINIMUM FIREPLACE OPENING (IN.)


| IDV26 | Width | Height | Depth |
|-------|------------|----------------------------------|----------------------------------|
| IDV26 | 33" / 28"* | 19 ¹ / ₂ " | 14 ¹ / ₄ " |

*Components In (CV1) 33", Components Out (CV2) 28"

MINIMUM UNIT COVERAGE – CLEAN VIEW

| IDV26 | Width | Height |
|-----------|----------------------------------|----------------------------------|
| I26CV1* | 34 ¹ / ₂ " | 22" |
| I26CV2* | 41 ¹ / ₂ " | 25 ¹ / ₂ " |
| I26CV3* | 34" | 22" |
| I26CVPF1* | 34 ¹ / ₂ " | 25" |
| I26CVPF2* | 41 ¹ / ₂ " | 32 ³ / ₈ " |
| I26CV1DS* | 34 ¹ / ₂ " | 22" |


*Back Frame Dimension of Clean View Kit



IDV26RL Traditional Brick Liner



LOGF27 Fibre Split Oak Logo Set



BLACK



1.



2.



3.



4.

1. IDV26N Direct Vent Insert – Natural Gas, LOGF27 Log Set, I26CVPF2BL Clean View Picture Frame – Black, IDV26RL Refractory Brick Liner.
2. IDV26N Direct Vent Insert – Natural Gas, I26CV2BL Clean View Kit – Black, LOGF27 Log Set, IDV26RL Refractory Brick Liner.
3. IDV26N Direct Vent Insert – Natural Gas, I26CVPF1BL Clean View Picture Frame – Black, LOGF27 Log Set, IDV26PRL Porcelain Reflective Liner.
4. IDV26N Direct Vent Insert – Natural Gas, I26CV1BL Clean View Kit – Black, I26S1BL Surround – Black, LOGF27 Log Set, IDV26RL Refractory Brick Liner.



VFI25

VENTED GAS FIREPLACE INSERT



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model VFI25N Vented Fireplace Insert – Natural Gas, V25S2640B Surround Deluxe – Black V25T2640B Trim Black, V2R2640 Riser for Deluxe Surround VI20GBL Grills – Black and LOGC6 Log Set – Five Piece Cast Split Oak with Glowing Ember Chunks.

| | |
|---------------------------|---------------------|
| Model | VFI25N / VFI25LP |
| Hi/Lo Fire Control | Yes |
| Input Max. (NG) | 25,000 – 17,000 BTU |
| Input Max. (LP) | 25,000 – 17,000 BTU |
| Venting | 4" |
| FE (P.4.1-15) | 44.58% |

The Ultimate in Vented Fireplace Inserts, convert your wood burning fireplace to gas.

STANDARD FEATURES

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Blower with a thermostat controlled On/Off including variable speed control is standard on all models
- Spill Safety Switch – in case of a blocked flue or downdraft, it will shut down the unit
- Dual burner system with glowing embers
- Bedroom and Bed Sitting Room approved
- Safety Screen Barrier



Safety Screen Barrier

OPTIONS

Log Sets

LOGC6 Five Piece Cast Split Oak Log Set with glowing ember chunks, or LOGC5 Four Piece Cast Split Oak

Grills

Available in Black

Surrounds Deluxe (3 piece)

Black with Black trim

Risers for Deluxe Surrounds

Increases height coverage by 2 1/2"

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat



Remote Control

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating




LOGC5 Split Cast Log Set

Model VFI25N Vented Fireplace Insert – Natural Gas, with V25S2640B Surround Deluxe – Black V25T2640B Trim Black, V2R2640 Riser for Deluxe Surround V120GBL Grills – Black and LOGC5 Log Set – Four Piece Split Oak Set.

INSERT DIMENSIONS

VFI25

| | | |
|-----------|-----------|-----------|
| A 15 1/2" | D 14" | G 8 1/4" |
| B 14" | E 24 1/4" | H 16 3/4" |
| C 20 1/2" | F 26 1/4" | I 19" |

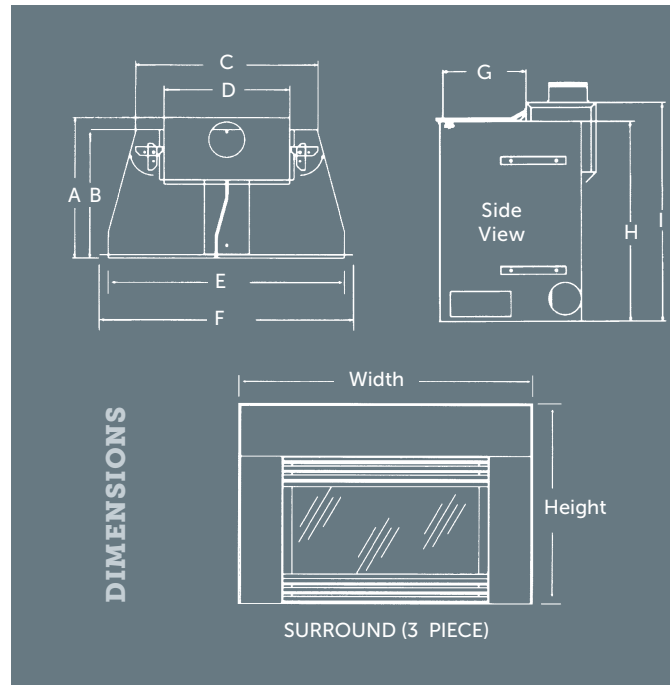

3 PIECE SURROUND DIMENSIONS (IN.)

| Models | Height | Width | Part# |
|---------------|-----------|-----------|-----------|
| DELUXE | | | |
| VFI25 | 24 13/16" | 36 13/16" | V25S2436B |

| | | | |
|---------------------|-----------|----------|-----------|
| DELUXE LARGE | | | |
| VFI25 | 26 13/16" | 40 3/16" | V25S2640B |

MINIMUM SIZE FOR INSTALLATION (IN.)

| Models | Front Width | Rear Width | Height | Depth |
|--------|-------------|------------|---------|-------|
| VFI25 | 24" | 20 1/2" | 17 1/2" | 16" |



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



OUTDOOR LIVING

Spend more time outdoors around the comfort and beauty of a Kingsman fireplace or fire pit.

Add to the enjoyment of your outdoor spaces with an outdoor fire pit or fireplace from Kingsman. A unique focal point for any deck or patio, our gas fire pits and fireplaces create instant ambiance and a natural gathering place for friends and family.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Outdoor Gas Fireplaces

| | |
|-------|-----|
| OFP42 | 5.2 |
|-------|-----|

Outdoor Fire Pits

| | |
|-------------|-----|
| FP2085/2785 | 5.4 |
|-------------|-----|



OFP42

ZERO CLEARANCE OUTDOOR GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

OFP42NS Outdoor Fireplace in Stainless Steel – Natural Gas, LOGF37 Split Oak Log Set, OFP42RLH Herringbone Brick Liner.

TWO FIREPLACE CHOICES AND NO VENTING REQUIRED

| | | |
|-------------------|-------------------|---------------------|
| Model | OFP42N OFP42NS | OFP42LP OFP42LPS |
| Fuel | Natural | Propane |
| Input Max. | 55,000 BTU | 55,000 BTU |
| Input Min. | 38,000 BTU | 44,000 BTU |

- Satin Coat with a Black Paint Finish and stainless steel pull screen. A great alternative when covering the front face with brick or other non combustible materials. (Satin coat steel is pretreated with a zinc coating for corrosion resistance and paint adhesion.)
- Stainless steel firebox, front and pull screens. Stainless steel provides a clean, contemporary and weather-resistant finish so that you can enjoy your fireplace for years to come.

STANDARD FEATURES*

- Hi/lo Millivolt valve with variable adjustment of flame and BTU
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- Stainless steel pull screen
- Lava Rock

OPTIONAL FEATURES

Surround

Stainless Steel

Remote Control

On/Off



Log Set

LOGF37 Log Set – Five Pieces

Weather Cover

Stainless Steel or Black

Spark Assist

Battery Operated Pilot Burner Ignitor

Refractory Liner

Traditional or Herringbone




SCREENED PORCH INSTALLATION GUIDELINES

- Porch Area - 96 sq. ft
- Ceiling Height - 92"
- A minimum of two walls can be screened but must be open to outside ventilation
Minimum Screen Height - 78"
Screen Area - 64 sq. ft

Refer to installation manual for additional details of framing specifications and clearances

UNIT AND FRAMING SPECIFICATIONS (IN.)

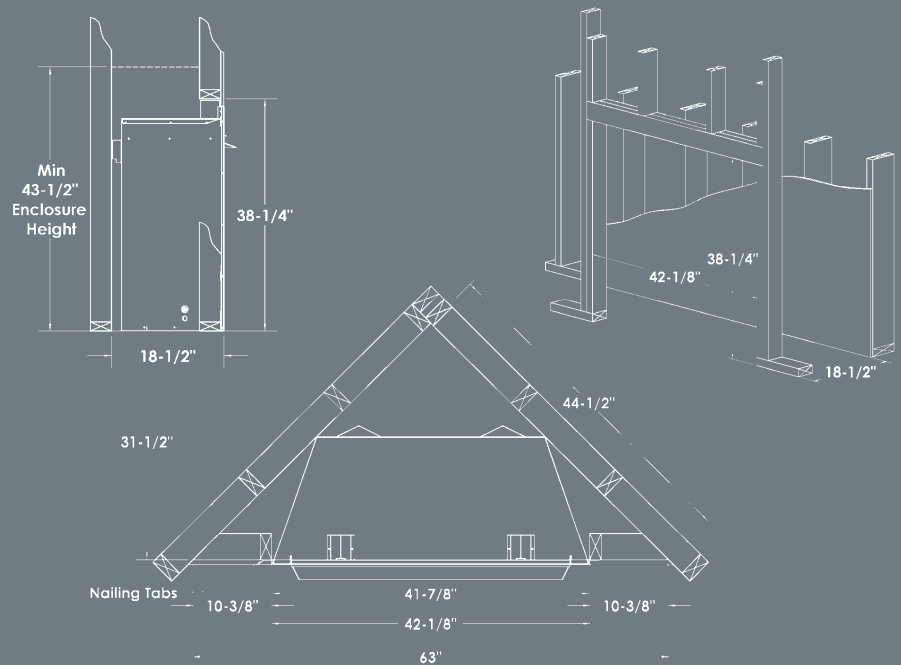

Model OFP42N Outdoor Fireplace – Natural Gas, LOGF37 Split Oak Log Set, OFP42RLT Traditional Brick Liner.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.
Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



FP2085/2785

OUTDOOR FIRE PITS



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model FP2085LP Round Fire Pit – Propane, FPB30SG Smooth Grey Concrete Fire Bowl.

Create your own design around your fire pit using non-combustible materials. Outdoor fire pits can be installed on top of wood decks or patios, 24" clearance to side walls. Allow 7 feet clearance from top of fire pit to any ceiling.



1.

MODEL FP2785 RECTANGULAR GAS FIRE PIT

| | | |
|----------------|------------|------------|
| Model: | FP2785N | FP2785LP |
| Fuel: | Natural | Propane |
| Input: | 65,000 BTU | 65,000 BTU |
| Size: | 20" x 27" | 20" x 27" |
| Height: | 9" | 9" |
| Cover: | Included | Included |



2.



3.

1. FP2785LP shown with LOGC85.
2. FP2785LP shown with cover.
3. FP2785N Rectangle Fire Pit shown with Lava Rock.



Optional cover available.

MODEL FP2085 ROUND GAS FIRE PIT

| | | |
|----------------|--------------|--------------|
| Model: | FP2085N | FP2085LP |
| Fuel: | Natural | Propane |
| Input: | 65,000 BTU | 65,000 BTU |
| Size: | 20" Diameter | 20" Diameter |
| Height: | 4 1/2" | 4 1/2" |
| Cover: | Optional | Optional |



1.



2.



3.



4.

1. FP2085LP Fire Pit - Propane, LOGC85 Log Set and FP20SSR Stainless Steel Ring.
2. FP20COV Table Top Cover for Round Fire Pit.
3. FPB30TB Textured Charcoal Concrete Fire Bowl and FP2085LP Round Fire Pit Propane.
4. FP2085N Round Fire Pit shown with Lava Rock.

Model FP2085LP Outdoor Fire Pit – Propane and FPB30SG – Smooth Grey Concrete Fire Bowl with FPB30TRG Trim Ring – Charcoal.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



VENT-FREE GAS FIREPLACES

Warm up your favorite room with the beauty of a Kingsman Gas Fireplace. Available in natural gas and propane, Kingsman quality fireplaces let you enjoy the beauty of glowing embers and dancing flames.

Create an elegant and warm focal point in your home. Choose from a variety of decorative options, including log sets, to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with more than 40 years of experience.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Vent-Free

| | |
|---------------|-----|
| ZVF24 | 6.2 |
| ZVF33 | 6.4 |
| ZVFCV39/42/47 | 6.6 |

Vent-Free Multi-sided

| | |
|-------|-----|
| MVF40 | 6.8 |
|-------|-----|



ZVF24

ZERO CLEARANCE VENT-FREE GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model ZVF24 Zero Clearance Vent-free Firebox, ZVFB2426MVN Vent-free Burner System Millivolt Natural Gas, LOGF10 Log Set – Fibre Split Oak, ZVF24DDA1BL Designer Door Arch, ZVF24RLT Brick Liner – Traditional

| Model | *ZVFB2410MVN | *ZVFB2410MVP | ZVFB2426MVN | ZVFB2426MVP |
|-------------|--------------|--------------|-------------|-------------|
| Fuel | Natural | Propane | Natural | Propane |
| Input Max. | 10,000 BTU | 10,000 BTU | 25,250 BTU | 24,250 BTU |
| Input Min. | - | - | 17,500 BTU | 19,000 BTU |
| Gas Control | Millivolt | Millivolt | Millivolt | Millivolt |

* This burner is approved for bedroom installation, unless stated otherwise. Check with your local jurisdiction before installing in a bedroom.

STANDARD FEATURES

- Millivolt Valve System
- An ODS sensor that constantly monitors the room air and provides 100% gas shut off if oxygen is reduced below acceptable levels
- Black Canopy Hood
- Pull Screen
- Matchless Piezo Ignition
- On/Off Rocker Switch
- Decorative Ash Bed

OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Black Arch Doors

Deluxe, Double Door, and Designer Arch Door

Designer Picture Frame Surround

Black, Silver Vein, Pewter, Copper Vein
Coverage – 25" w x 29" h

Brick Refractory Liner

Traditional, Herringbone

Wall Mount Thermostat

Standard On/Off or Programmable
5 day (weekday) and 2 day (weekend)

Remote Control

On/Off, Thermostat on/off,
Thermostat On/Off modulating,




Traditional
Brick Liner RLT



Herringbone
Brick Liner RLH

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Model | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|-------|----------------------|----------------|--------------|--------------------|---------------------|--------------------|
| ZVF24 | 29 ^{15/16"} | 30" | 24" | 24 ^{3/8"} | 13 ^{1/16"} | 12 ^{3/4"} |

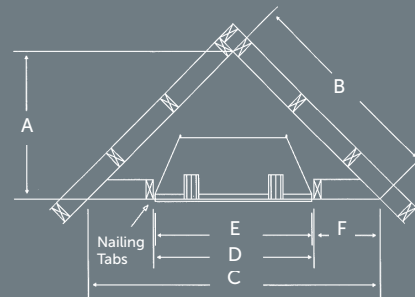

CORNER FRAMING DIMENSIONS

ZVF24

| | |
|---|---------------------|
| A | 20 ^{1/2"} |
| B | 29" |
| C | 41 ^{1/16"} |
| D | 24 ^{3/8"} |
| E | 24" |
| F | 8 ^{3/8"} |



LOGF10 Log Set Cabinet Oak – Stained Cherry

Model ZVF24 Vent-Free Firebox with ZVFB2426MVN Vent-Free Burner System - Natural Gas LOGF10 Log Set, ZVF24RLT Brick Liner - Traditional, ZVF24SDBL Designer Surround Black.



LOGF10 Log Set Cabinet Painted White

Model ZVF24 Vent-Free Firebox with ZVFB2426MVN Vent-Free Burner System - Natural Gas LOGF10 Log Set, ZVF24RLT Brick Liner - Traditional, ZVF24SDBL Designer Surround Black, ZVF24ADDD Arch Door, Double Door.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



ZVF33

ZERO CLEARANCE VENT FREE GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model ZVF33P Zero Clearance Vent Free Fireplace, ZVFB3330MVN Vent Free Millivolt Natural Gas Burner System, LOGF24 Fibre Split Oak Log Set, VI30GBL Grill Kit – Black.

| ZVF33 | FUEL | GAS CONTROL | MAX. | LOW |
|-------------|---------|-------------|--------|--------|
| ZVFB3330MAN | Natural | Manual | 30,000 | 13,000 |
| ZVFB3330MAP | Propane | Manual | 30,000 | 22,000 |
| ZVFB3330MVN | Natural | Millivolt | 30,000 | 13,000 |
| ZVFB3330MVP | Propane | Millivolt | 30,000 | 22,000 |

STANDARD FEATURES

- Hi/low Millivolt or manual valve with variable adjustment of flame and BTU
- An ODS sensor that constantly monitors the room air and provides 100% gas shut off if oxygen is reduced below acceptable levels
- Black Canopy Hood
- Matchless Piezo Ignition
- Pull Screen
- Decorative Ash Bed
- Wall Switch Control (for Millivolt Systems Only)

OPTIONAL FEATURES

Fan Kit

Heat activated blower with variable speed control

Grills

Black

Surrounds Wide

Black

Coverage:

- 31 3/16" h x 36 5/8" w

Thermostat (Millivolt)

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control (Millivolt)

On/Off, Thermostat or Hi/Lo On/Off


Log Sets

LOGF18 and LOGF24



CORNER FRAMING DIMENSIONS (IN.)

| | A | B | C | D | E | F |
|-------|---------|---------|---------|---------|---------|----------|
| ZVF33 | 30 3/8" | 42 7/8" | 60 5/8" | 33 1/8" | 32 1/2" | 13 9/16" |

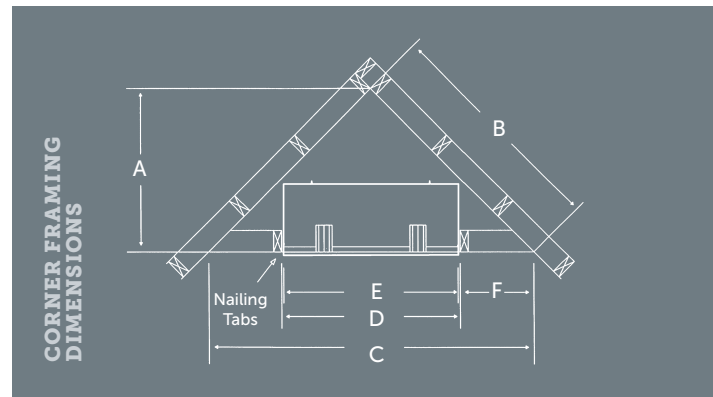

VENT-FREE FIREBOX UNIT AND FRAMING SPECIFICATIONS (IN.)

| Top Flue Models | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|-----------------|---------------|----------------|--------------|---------------|--------------|---------------|
| ZVF33 | 30 1/2" | 31" | 32 1/2" | 33 1/8" | 14" | 14" |

The ultimate in Zero Clearance Vent-Free Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.



LOGF18 Log Set



LOGF24 Log Set



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



ZVFCV39/42/47

ZERO CLEARANCE UNIVERSAL VENT FREE GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model ZVFCV42 Zero Clearance Universal Vent Free Fire Place, GLVF24MVN Vent Free Millivolt Natural Gas Burner, LOGF24 Fibre Split Oak Log Set, ZCV42RLH Herringbone Brick Liner.

| Model: | GLVF24MAN | GLVF24MAP | GLVF24MVN | GLVF24MVP |
|--------------|------------|------------|------------|------------|
| Fuel: | Natural | Propane | Natural | Propane |
| Gas Control: | Manual | Manual | Millivolt | Millivolt |
| Input Max: | 38,250 BTU | 38,000 BTU | 38,250 BTU | 38,000 BTU |
| Input Min: | 25,500 BTU | 29,000 BTU | 25,500 BTU | 29,000 BTU |

STANDARD FEATURES

- Hi/low Millivolt or manual valve with variable adjustment of flame and BTU
- An ODS sensor that constantly monitors the room air and provides 100% gas shut off if oxygen is reduced below acceptable levels
- Black Canopy Hood
- Matchless Piezo Ignition
- Pull Screen
- Decorative Ash Bed
- Wall Switch Control (for Millivolt Systems Only)

OPTIONAL FEATURES

Fan Kit

Blower with variable speed control

Surrounds

- ZCV39S1BL – Hearth Mount 4" Wide
Coverage: 40 5/8" W x 35" H
- ZCV39S1PFBL – Picture Frame 4" Wide
Coverage: 40 5/8" W x 37" H
- ZCV39S2PFBL – Surround - Picture Frame 1 5/8" Wide
Coverage: 36 1/8" W x 32 1/2" H
- ZCV42S1BL – Hearth Mount 4" Wide
Coverage: 44 5/8" W x 38 1/8" H
- ZCV42S1PFBL – Picture Frame 4" Wide
Coverage: 44 5/8" W x 40 1/8" H
- ZCV42S2PFBL – Surround - Picture Frame 1 5/8" Wide
Coverage: 40 1/8" W x 35 5/8" H
- ZCV47S1BL – Hearth Mount 4"
Coverage: 50 9/16" W x 43 3/16" H

Thermostat (Millivolt)

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

Brick Liners

ZVFCV39/42 Brick Options

Refractory Fiber Brick Liner (3 PCE) – Traditional, Herringbone, Red Herringbone, Stacked Brick


ZVFCV47 Brick Options

Traditional and Herringbone



CORNER FRAMING DIMENSIONS (IN.)

| | ZVFCV39 | ZVFCV42 | ZVFCV47 |
|---|-----------|----------|-----------|
| A | 33" | 34 3/4" | 39 1/2" |
| B | 46 5/8" | 49 1/8" | 55 13/16" |
| C | 13 1/4" | 13 1/2" | 15 1/4" |
| D | 39 1/2" | 42 1/2" | 48 1/2" |
| E | 65 15/16" | 69 7/16" | 78 15/16" |

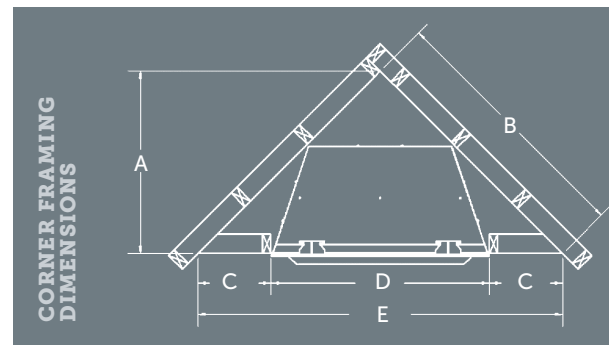

UNIT AND FRAMING SPECIFICATIONS (IN.)

| Models | Height Actual | Height Framing | Width Actual | Width Framing | Depth Actual | Depth Framing |
|---------|---------------|----------------|--------------|---------------|--------------|---------------|
| ZVFCV39 | 37 1/4" | 37 5/16" | 39 3/8" | 39 1/2" | 20 3/16" | 20 5/16" |
| ZVFCV42 | 40 5/16" | 40 3/8" | 42 7/16" | 42 1/2" | 20 3/16" | 20 5/16" |
| ZVFCV47 | 45 3/8" | 45 7/16" | 48 3/8" | 48 1/2" | 22 1/2" | 22 5/8" |

FIREBOX SPECIFICATIONS (IN.)

| Model | Firebox Height | Firebox Width (Front) | Firebox Width (Back) | Firebox Depth |
|---------|----------------|-----------------------|----------------------|---------------|
| ZVFCV39 | 26" | 29 3/4" | 22 1/2" | 15 1/2" |
| ZVFCV42 | 29 1/8" | 33 7/8" | 26 7/8" | 15 1/2" |
| ZVFCV47 | 34 1/8" | 39 3/4" | 29 3/4" | 17 1/4" |



LOGF18 Log Set



LOGF30 Log Set (For ZVFCV47 only)



MVF40

VENT-FREE MULTI-SIDED FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model MVF40 Vent Free Multi-Sided Fireplace, GLMVF40MVP Burner System – Liquid Propane, LOGC31 Split Oak Log Set, MVF40PK Peninsula Kit, MGPBKBL Grill Kit Peninsula – Black.

| | | |
|---------------------|---------------|---------------|
| Burner Model | GLMVF40MVN | GLMVF40MVN |
| Fuel | Natural | Propane |
| BTU Input | 25,900-38,200 | 24,200-30,500 |
| Type | Millivolt | Millivolt |
| Log Set | LOGC31 | LOGC31 |

Create an elegant and warm focal point in your homewith the Ultimate in Zero Clearance Vent-Free Fireplaces for New Home Construction or Renovation.

STANDARD FEATURES

- Matchless Pieso Ignition
- ODS Safety Pilot
- Millivolt Control with Variable Flame and BTU Control
- Wall Switch Control
- Decorative Rock

OPTIONAL FEATURES

Grills

Black

Refractory Liner

End Panel, Side Panel

Surrounds Wide (for See-through only)

Black

Fan Kit

Thermostat (Millivolt)

Wall Mount Millivolt Thermostat or Programmable Thermostat




Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control





UNIT AND FRAMING SPECIFICATIONS (IN.)

| Model | Height Framing | Width Framing | Depth Framing |
|---------------|----------------|---------------|---------------|
| PENINSULA | 33 3/4" | 20 5/8" | 38 5/8" [1] |
| SEE-THRU | 33 3/4" | 20 5/8" | 41 1/8" [2] |
| BAY PENINSULA | 33 3/4" | 23 11/16" | 35 1/16" [3] |
| CORNER | 33 3/4" | 23 3/4" | 38 5/8" [4] |
| ISLAND | See Manual | | |

1. MVF40 Fireplace, GLMVF40MVP Burner System, LOGC31 Split Oak Log Set, MVF40SK See-Through Kit, MGSKBL Grill Kit See Through – Black.
2. MVF40 Fireplace, GLMVF40MVP Burner System, LOGC31 Split Oak Log Set, MVF40CK Corner Kit, MGCKBL Grill Kit Corner – Black.

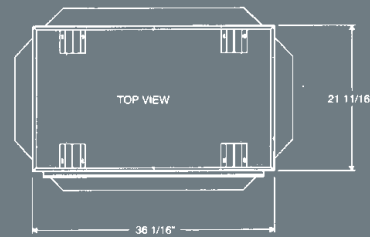

- [1] Using Nailing Tabs with 1/2" Facing, Otherwise 37 9/16"
- [2] Using Nailing Tabs, Otherwise 40 1/16"
- [3] Using Nailing Tabs with 1/2" Facing, Otherwise 13 1/8"
- [4] Using Nailing Tabs with 1/2" Facing, Otherwise 37 9/16"

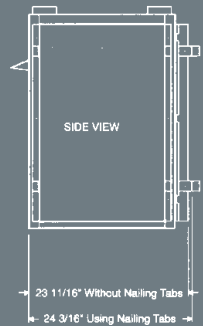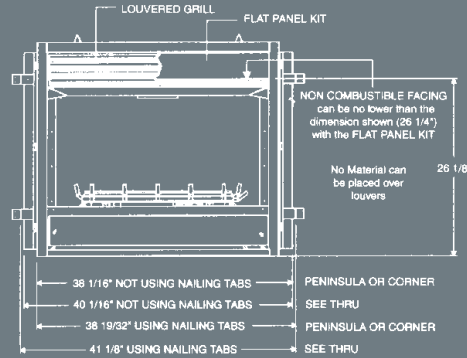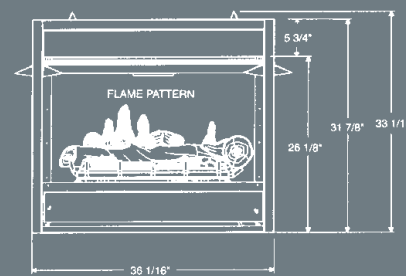

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



GAS LOG SETS & BRICK OPTIONS

Enjoy the elegance and warmth of glowing embers and dancing flames around our oak log set. It is sure to be the focal point of your home.

Logs are available for vented or vent-free applications in propane or natural gas. They can be installed in universal fireboxes (vent free only), masonry fireplaces and zero clearance wood burning fireplaces. Kingsman offers a variety of styles with different features and benefits.

You can also change up the look of your Kingsman Fireplace with your choice of brick liners. From traditional, herringbone, or stacked brick panels, you can customize any unit to suit your personal style.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

**Gas Log Sets
– Vented/Vent-Free**

GLVF24/40 7.2

VB18/VB24 7.4

Brick Liners 7.6



GLVF24/40 LOG SETS

VENT/VENT-FREE GAS LOG SETS



STANDARD FEATURES

- Matchless Piezo Ignition
- ODS Safety Pilot
- Variable Flame and BTU Control
- Wall Switch Control (Millivolt Only)
- Decorative Rock

OPTIONAL FEATURES

- Remote Control (Millivolt Only)
- Millivolt or Manual Valve System

Enjoy the elegance and warmth of dancing flames around our oak log set. It is sure to be the focal point of your home. Choose from a variety of decorative options to create your own distinctive appearance and be assured of complete safety, comfort and long lasting value from a manufacturer of wood and gas fireplaces with over 40 years of experience.

1. LOGF18 LOG SET
Gas Burner – GLVF24MAN

2. LOGF24 LOG SET
Gas Burner – GLVF24MVN

3. LOGF30 LOG SET
Gas Burner – GLVF24MVN

4. LOGC31 LOG SET – SEE THROUGH
Gas Burner – GLMVF40MVN



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

YOUR BEST CHOICE FOR CONVERTING YOUR WOOD BURNING FIREPLACE TO GAS.



VENTED/VENT-FREE GAS LOG SETS

| BURNER MODEL | LOG SET | TYPE | FUEL TYPE | BTU INPUT |
|--------------|-------------|-----------|-----------|-----------------|
| GLVF24MAN | 18"/24"/30" | Manual | Natural | 25,500 - 38,250 |
| GLVF24MAP | 18"/24"/30" | Manual | Propane | 29,000 - 38,000 |
| GLVF24MVN | 18"/24"/30" | Millivolt | Natural | 25,500 - 38,250 |
| GLVF24MVP | 18"/24"/30" | Millivolt | Propane | 29,000 - 38,000 |
| *GLMVF40MVN | LOGC31 | Millivolt | Natural | 25,900 - 38,200 |
| *GLMVF40MVP | LOGC31 | Millivolt | Propane | 24,000 - 30,500 |

The GLVF24 Burner may be used in the ZVF36U, ZVF42U or ZCVF39/42/47 Universal Vent-Free Firebox

MINIMUM FIREPLACE DIMENSIONS

| | BACK WIDTH | FRONT WIDTH | DEPTH | HEIGHT |
|---------|----------------------------------|-------------|----------------------------------|----------------------------------|
| LOGF18 | 19" | 19" | 12 ¹ / ₂ " | 18 ³ / ₄ " |
| LOGF24 | 22 ¹ / ₂ " | 29" | 12 ¹ / ₂ " | 18 ³ / ₄ " |
| LOGF30 | 28" | 38" | 13 ¹ / ₂ " | 18 ³ / ₄ " |
| *LOGC31 | 34" | 34" | 19 ¹ / ₂ " | 19 ¹ / ₂ " |

*The GLMVF40 Series can be viewed from all sides, great as a see-thru, corner, peninsula or island **unit**.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



LOG SETS

VENTED GAS LOG SETS



VGB18 / VLOG18
Grate Burner



VSB18 / VLOG18
Ash Bed Burner



VGB24 / VLOG24
Grate Burner



VSB24 / VLOG24
Ash Bed Burner



VGB24 / VLOG30
Grate Burner



VSB24 / VLOG30
Ash Bed Burner



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

18" BURNER

| | | |
|------------------|---------------|---------------|
| Model | VGB18N | VGB18LP |
| | VSB18N | VSB18LP |
| Fuel | Natural | Propane |
| Input BTU | 30,500-48,500 | 38,000-47,000 |
| Log Size | 18"- 24" | 18"- 24" |

24" BURNER

| | | |
|------------------|---------------|---------------|
| Model | VGB24N | VGB24LP |
| | VSB24N | VSB24LP |
| Fuel | Natural | Propane |
| Input BTU | 46,000-73,000 | 68,000-86,000 |
| Log Size | 24"- 30" | 24"- 30" |

STANDARD FEATURES*

- Enhancing Ember Bed Burner
- Matchless Piezo Ignition
- Variable Flame and BTU Control
- On/Off Rocker Switch
- Decorative Rock and Glowing Ember Kit
- Millivolt Valve system with adjustable flame height

OPTIONAL FEATURES

Remote Control

Ember Log Bit Kit

6 piece or 4 piece

VLOG18 Split Oak 18"

VLOG24 Reversible Charred Split or Barked Oak 24"

VLOG30 Reversible Charred Split or Barked Oak 30"


LOG SET ENHANCEMENTS



VLBIT6



VLBIT4

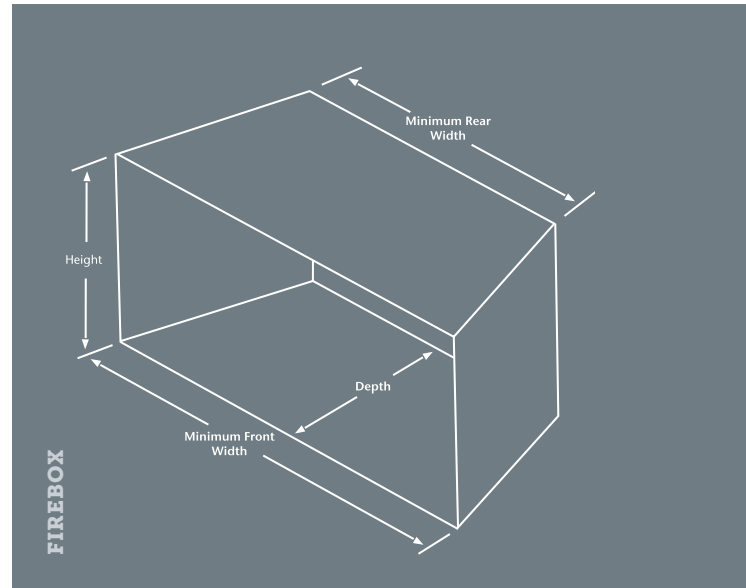

| BURNER & LOG SET | Front Width (min.) | Rear Width (min.) | Depth | Height |
|-----------------------------|--------------------|-------------------|-------|--------|
| 18" Burner x 18" Log Set | 25" | 18" | 15" | 18" |
| 18" Burner x 24" Log Set | 29" | 21" | 15" | 18" |
| 24" Burner x 24" Log Set | 34" | 24" | 16" | 18" |
| 24" Burner x 30" Log Set | 36" | 26" | 17" | 18" |

Note: Flame appearance and flame height will vary with specific installations.



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.



BRICK LINER OPTIONS



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model HBZDV4736N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGF36 Log Set, HB47CVCK Designer Clean View Circulating Kit, and Optional HB47RRH Red Herringbone Brick Liner.



**Traditional
Brick Liner RLT**



**Herringbone
Brick Liner RLH**



**Red Herringbone
Brick Liner RRH**



**Stacked
Brick Liner RLS**

| MODELS | Traditional Brick Liner RLT | Herringbone Brick Liner RLH | Red Herringbone Brick Liner RRH | Stacked Brick Liner RLS |
|----------------------------------|--|--|--|------------------------------------|
| ZERO CLEARANCE FIREPLACES | | | | |
| MDV31 | MDV38RLE/MDV38RLS | | | |
| HBZDV3624/28, HBZDV4224/28 | HB36/42/47RLT | HB36/42/47RLH | HB36/42/47RRH | |
| HBZDV4736 | HBZDV4736RLT | HBZDV4736RLH | HBZDV4736RRH | |
| ZCV39/ZCV42 | ZCV39/42RLT | ZCV39/42RLH | ZCV39/42RRH | ZCV39/42RLS |
| MCVP42 | MCVP42RLT | | | |
| MCVST42 | MCVST42RLT | | | |
| INSERTS | | | | |
| IDV26 | IDV26RLT | | | |
| IDV33 | IDV33RL | | | |
| IDV43 | IDV36RLT | IDV36RLH | | |
| VENT FREE | | | | |
| ZVFCV39/42/47 | ZCV39/42/47RLT | ZCV39/42/47RLH | ZCV39/42RRH | ZCV39/42RLS/47RLS |
| ZVF24 | ZVF24RLT | ZVF24RLH | | |



Model ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set – Five Piece, ZCV39RLH Refractory Brick Liner – Herringbone.



Model HBZDV4228N, HB42CVCK Designer Clean View Kit, LOGC43 Log Set, with optional HB42RLT Traditional Refractory Liner.



LIMITED LIFETIME WARRANTY

This Limited Lifetime Warranty applies only while the unit remains at the site of the original installation and only if the unit is installed inside the continental United States, Alaska, Hawaii, and Canada. The warranty applies only if the unit is installed and operated in accordance with the printed instructions and in compliance with applicable installation and building codes and good trade practices.

BASIC ONE YEAR WARRANTY

During the first year after installation, we will provide a replacement for any component part of your unit found to be defective in materials or workmanship, including labour costs. Repair work requires prior approval by Kingsman, labour costs are based on a predetermined rate schedule and any repair work must be done through an authorized Kingsman dealer. (Excluded Components: Accent Light Bulbs, Gasketing and Paint).

LIMITED LIFETIME WARRANTY

The heat exchanger, combustion chamber and burner of every Kingsman product excluding the Outdoor Firepit are warranted against materials or workmanship during the period the product is owned by the original owner. The part to be replaced must be returned to our distributor in exchange for the replacement part. Any labor, material, freight and/or handling charges associated with any repair or replacement pursuant to this Limited Lifetime Warranty will not be covered by this warranty.

GENERAL TERMS

In lieu of providing a replacement part, we may, at our option, provide the distributor's component purchase price from us or a credit equal to the distributor's component purchase price from us toward the purchase of any new unit which we distribute. If a credit is given in lieu of a replacement part, the rating plate from the unit being replaced must be submitted on a warranty claim, and the unit being replaced must be made available to our distributor for disposition.

In establishing the date of installation for any purpose, including determination of the starting date for the term of this Limited Lifetime Warranty, reasonable proof of the original installation date must be presented*, otherwise the effective date will be based upon the date of manufacture plus thirty (30) days.

We will not be responsible for and you, the user, will pay for: (a) damages caused by accident, abuse, negligence, misuse, riot, fire, flood, or Acts of God (b) damages caused by operating the unit where there is a corrosive atmosphere containing chlorine, fluorine, or any other damaging chemicals (other than in a normal residential environment) (c) damages caused by any unauthorized alteration or repair of the unit affecting its stability or performance (d) damages caused by improper matching or application of the unit or the unit's components (e) damages caused by failing to provide proper maintenance and service to the unit (f) any expenses incurred for erecting, disconnecting or dismantling the unit (g) parts or supplies used in connection with service or maintenance (h) damage repairs, inoperation or inefficiency resulting from faulty installation or application (i) electricity or fuel costs or any increase in electricity or fuel cost whatsoever including additional or unusual use of supplemental electric heat.

We shall not be liable for any incidental, consequential, or special damages or expenses in connection with any use or failure of this unit. We have not made and do not make any representation or warranty of fitness for a particular use or purpose, and there is no implied condition of fitness for a particular use or purpose. We make no express warranties except as stated in this Limited Lifetime Warranty. No one is authorized to change this Limited Lifetime Warranty or to create for us any other obligation or liability in connections with this unit. Any implied warranties shall last for one year after the original installation. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages or do not allow limitations on how long an implied warranty or condition lasts, so the above limitations or exclusions may not apply to you. The provisions of this limited warranty are in additions to and not a modification of or subtraction from any statutory warranties and other rights and remedies provided by law.

2340 Logan Avenue, Winnipeg, Manitoba, Canada R2R 2V3 P (204) 632-1962 F (204) 632-1960
www.kingsmanfireplaces.com



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Printed in Canada 04/18

Canada

ENERGUIDE

Look for the **EnerGuide**
Gas Fireplace Energy
Efficiency Rating in this brochure

Based on CSA P.4.1-15