





Model FDV350N FDV350LP Fuel Natural Propane Input Max 37.000 BTU 35.000 BTU 29.000 BTU 27.000 BTU Input Min. FE (P.4.1-15) 66.63% 67.64%

Direct Vent Free Standing Stove; a Safe and Efficient Heating Appliance with the Convenience of Gas. Your best choice for installation anywhere throughout your home.

# STANDARD FEATURES

- Millivolt Valve with Hi-Low heat and flame adjustment and allows operation during a power failure
- Dual burner system, with realistic flame pattern
- Heat radiating ceramic glass with panoramic view from three sides
- Mobile home approved
- Approved for installation in a bedroom or bed sitting room
- Black Louver
- Fibre Oak Log Set with Embers\*

#### **OPTIONAL FEATURES**

Heat activated with variable speed control

# **Brick Refractory Liner**

# **Thermostat**

Wall Mount Millivolt Thermostat or Programmable Thermostat

### Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating

# B-Vent Adapter (Convert Stove to 4" B-Vent)



# **MINIMUM CLEARANCES** TO COMBUSTIBLES

**12"** from side of unit

3" from back of unit

from side of unit in corner

# **ALCOVE INSTALLATION**

30" depth (max.)

551/2" height (max.)

**52½"** width (max.)


# **DIMENSIONS AND SIZING**

303/8" 275/16"

appliance you can vent either through

191/16"

the side wall above the unit or straight up

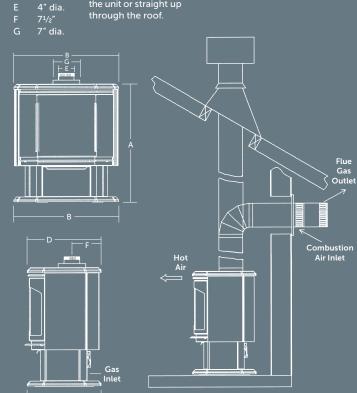



Safety Screen



Gas Fireplace Energy
Efficiency Rating in this brochure

Based on CSA P.4.1-15





birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

FOR CALIFORNIA RESIDENTS ONLY: