



# FDV200S

FREE-STANDING DIRECT-VENT GAS STOVE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

The unit illustrated is the FDV200SN Free Standing Stove (Natural Gas), LOGC200 Log Set (Cast Split Oak with glowing embers).



2340 Logan Avenue  
 Winnipeg, Manitoba, Canada R2R 2V3  
 Phone: (204) 632-1962 Fax: (204) 632-1960  
[www.kingsmanfireplaces.com](http://www.kingsmanfireplaces.com)

The FDV200S Direct Vent model provides sealed combustion where it draws outside air for combustion. This model can be vented either horizontally or vertically.

### SPECIFICATIONS

<b>Model</b>	FDV200SN	FDV200SLP
	FDV200SNE2	FDV200SLPE2
<b>Fuel</b>	Natural	Propane
<b>Input Max</b>	28,500 BTU	26,000 BTU
<b>Input Min</b>	19,500 BTU	20,000 BTU
<b>FE (P.4.1-15)</b>	66.14%/68.56%	67.47%/69.89%

### Minimum Clearances to Combustibles:

- 6" from side of unit
- 3" from back of unit
- 3" from side of unit in corner

### Alcove Installation:

- 30" depth (max.)
- 56" height (min.)
- 53" width (min.)

### STANDARD FEATURES\*

- Millivolt or IPI valve system allows operation during a power failure with Hi-Low heat and flame adjustment
- Proflame II (PF2) models include Remote Control – features flame, fan, thermostat, smart thermostat and battery backup
- Dual burner system, with realistic flame pattern
- Heat radiating ceramic glass
- Mobile home approved
- Approved for installation in a bedroom or bed sitting room
- Cast Oak Log Set with glowing embers\*
- Safety Screen Barrier\*\*

### OPTIONAL FEATURES

#### Fan Kit

Heat activated with variable speed control

#### Brick Refractory Liner

3 pieces

#### Thermostat

Wall Mount Millivolt / Programmable Thermostat

#### Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off Modulating.



Safety Screen Barrier




PF2

PF1 or MV

GFRC, MV or PF1

\*\*All gas fireplaces manufactured as of January 1, 2015 will include a Safety Screen Barrier

### SIZING AND DIMENSIONS

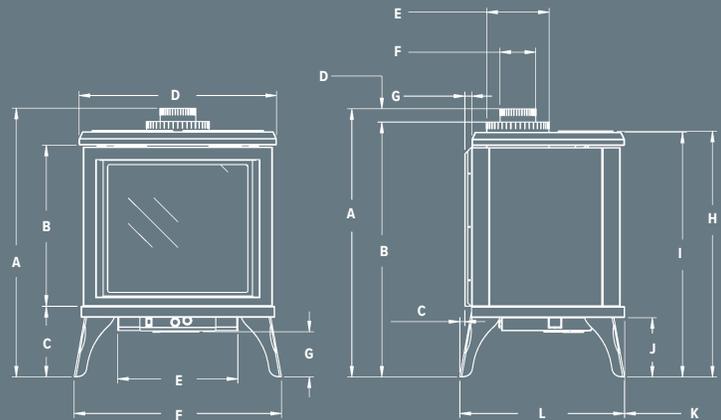

#### FRONT VIEW

- A 30 9/16"
- B 18 1/8"
- C 8 5/16"
- D 22 5/32"
- E 13 1/2"
- F 23 13/32"
- G 5 7/16"

#### SIDE VIEW

- A 30 9/16"
- B 29 1/16"
- C 5/8"
- D 1 1/2"
- E 7"
- F 4"
- G 25/32"
- H 28 1/32"
- I 27 29/32"
- J 7 1/16"
- K 7/32"
- L 18 19/32"



The unit illustrated is the FDV200SN Free Standing Stove (Natural Gas), LOGC200 Log Set (Cast Split Oak with glowing embers), FDV200RL Refractory Brick Liner.

With a direct vent appliance you can vent either through the side wall above the unit or straight up through the roof.

Canada

**ENERGUIDE**

Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-15



#### FOR CALIFORNIA RESIDENTS ONLY:

**WARNING!** This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



\*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.  
 Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certified for USA and Canada to: ANSI Z21.88-2017 / CSA 2.33-2017, CSA 2.17-2017



CRAFTED ENTIRELY IN CANADA, EACH KINGSMAN FIREPLACE IS BUILT TO THE HIGHEST STANDARDS AND MADE TO LAST.

Printed in Canada  
 07/19 – B045