

HBZDV3624/28, HBZDV4224/28

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE





HBZDV3624/28, HBZDV4224/28

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE



OPTIONS



LOGC43



LOGC44

LINERS



Traditional Brick Liner RI



Herringbone Brick Liner RLH



Red Herringbone Brick Liner RRH

THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

DESIGNER CLEAN VIEW™ OR LOUVERED FIREPLACES

Model HBZDV3624N HBZDV3624LP HBZDV3628N HBZDV3628LP HBZDV4224N HBZDV4224LP HBZDV4228N HBZDV4228LP HBZDV3624NE HBZDV3624LPE HBZDV3628NE HBZDV3628LPE HBZDV4224NE HBZDV4224LPE HBZDV4228NE HBZDV4228LPE Flue Тор Тор Top Top Top Top aoT Top **Fuel** Natural Propane Natural Propane Natural Propane Natural Propane Input Max. 24.000 BTU 22.000 BTU 28.000 BTU 26.000 BTU 24.000 BTU 22.000 BTU 28.000 BTU 26.000 BTU Input Min. 14.000 BTU 15.000 BTU 20.000 BTU 19.000 BTU 14.000 BTU 15.000 BTU 20.000 BTU 19.000 BTU FE (P.4.1-15) 50.48%/52.3% 52.59%/54.24% 60.61%/62.69% 62.48%/64.16% 55.69%/57.81% 57.03%/59.09% 68.04%/70.16% 65.29%/67.66%

Kingsman's Direct Vent models are easily adaptable to our patented Designer Clean View technology or standard louvers. Enjoy an incredible line of options and styles—from contemporary to classic — plus the beauty and pleasure of a cozy fire.

STANDARD FEATURES

- Millivolt or IPI valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed
- Safety Screen Barrier

OPTIONAL FEATURES

Designer Clean View Circulating Kit

(No Louvers Required)

Grills

Available in Black

Surrounds Wide (Louvered Units)

Available in Black

Coverage • HBZDV3624/28 - 35 1/2" h x 41 1/8" w Coverage • HBZDV4224/28 - 37 5/8" h x 45 1/8" w

Fan Kit

Heat activated with variable speed control

Brick Refractory Liner

Traditional, Herringbone, and Red Herringbone

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control

Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control


Loa Sets

LOGC43 Traditional Oak Four Piece or LOGC44 Burnt Oak Eight Piece Log Set



CORNER FRAMING DIMENSIONS

	LOUVE	CLEAN VIEW CIRCULATING KIT (CVCK)			
	HBZDV36	HBZDV42	НВ	ZDV36	HBZDV42
A B C D E F G	54 ¹³ /16" 36 ³ /8" 36" 9 ³ /16" 38 ³ /4" 12 ³ /8" 17 ⁹ /16" 27 ³ /8"	58 ¹³ /16" 42 ³ /8" 42" 8 ¹ /4" 41 ⁵ /8" 13 ³ /4" 19 ¹ /2 29 ⁷ /16	59 ⁷ 38 ¹ 38 ¹ 10 ¹ 42 ⁵ 12 ³ 17 ⁹ 29 ¹	//16" /16" 1/16" /16" /16"	63 ¹³ /16" 42 ⁷ /16" 42 ¹ /16" 10 ¹ /16" 45 ¹ /8" 13 ³ /4" 19 ¹ /2" 31 ⁷ /8"

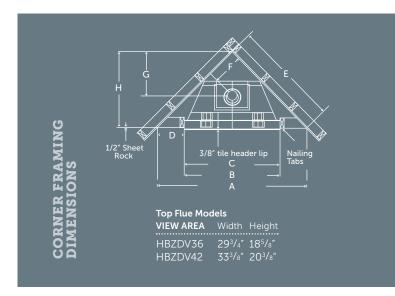

UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models		Height Framing	Width Width Actual Framing	Depth Depth Actual Framing						
LOUVERS HBZDV36 HBZDV42	34 ¹³ /16" 37"	35" 37 ¹ / ₈ "	36" 36 ³ /8" 41 ⁷ /8" 42 ³ /8"	16 ⁷ /16" 17" 16 ⁷ /16" 17"						
CLEAN VIEW CIRCULATING KIT (CVCK) HBZDV36 34 ¹¹ /16" 41" 38 ¹ /16" 38 ⁷ /16" 187/8" 19 ¹ /2" HBZDV42 36 ¹³ /16" 43" 42 ¹ /16" 42 ⁷ /16" 18 ¹⁵ /16" 19 ¹ /2"										



HBZDV3624/28, HBZDV4224/28

ZERO CLEARANCE **DIRECT VENT** GAS FIREPLACE





*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification. Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: ANSI Z21.88-2017 • CSA 2.33-2017, CSA 2.17-2017 Vented Gas Fireplace Heater.





FOR CALIFORNIA RESIDENTS ONLT:
WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.