

# ZVFCV39/42/47

ZERO CLEARANCE UNIVERSAL **VENT FREE** GAS FIREPLACE



Unit illustrated is a ZVFCV42 Zero Clearance Universal Vent Free Fire Place, with GLVF24MVN Vent Free Millivolt Natural Gas Burner, LOGF24 Fiber Split Oak Log Set, ZCV42RLH Herringbone Brick Liner.





25,500 BTU

Find all detailed ZVFCV39-42-47 manuals.

29,000 BTU

**Vent-Free appliances** can only be installed in some areas of the **United States.** 

2340 Logan Avenue Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960 www.kingsmanfireplaces.com

**GLVF24MAN GLVF24MAP GLVF24MVN** Model: **GLVF24MVP** Fuel: Natural Propane **Natural** Propane Gas Control: Manual Manual Millivolt Millivolt 38,000 BTU **Input Max:** 38,250 BTU 38,250 BTU 38,000 BTU

29,000 BTU

FOR CALIFORNIA RESIDENTS ONLY: WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

### STANDARD FEATURES

25,500 BTU

- Hi/low Millivolt or manual valve with variable adjustment of flame and BTU
- An ODS sensor that constantly monitors the room air and provides 100% gas shut off if oxygen is reduces below acceptable levels
- Black Canopy Hood
- Matchless Piezo Ignition
- Pull Screen

**Input Min:** 

- · Decorative Ash Bed
- Wall Switch Control (for Millivolt Systems Only)

### **OPTIONAL FEATURES**

#### Fan Kit

Blower with variable speed control

#### Surrounds

- ZCV39S1BL Hearth Mount 4" Wide Coverage: 40 5/8" W x 35" H
- ZCV39S1PFBL Picture Frame 4" Wide **Coverage:** 40 5/8" W x 37" H
- ZCV39S2PFBL Surround Picture Frame 1 5/8" Wide Coverage: 36 1/8" W x 32 1/2" H
- ZCV42S1BL Hearth Mount 4" Wide Coverage: 44 5/8" W x 38 1/8" H
- ZCV42S1PFBL Picture Frame 4" Wide Coverage: 44 5/8" W x 40 1/8" H
- ZCV42S2PFBL Surround Picture Frame 1 5/8" Wide Coverage: 40 1/8" W x 35 5/8" H
- ZCV47S1BL Hearth Mount 4" Coverage: 50 %16" W x 43 3/16" H

#### Thermostat (Millivolt)

Wall Mount Millivolt Thermostat or Programmable Thermostat

#### Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

### **Brick Liners**

## **ZVFCV39/42 Brick Options**

Refractory Fiber Brick Liner (3 piece);

Traditional, Herringbone, Red Herringbone, Stacked Brick

### **ZVFCV47 Brick Options**

Traditional and Herringbone



Brick Liner RLT

Traditional



Brick Liner RLH










PF1 or MV

## **CORNER FRAMING DIMENSIONS (IN.)**

	ZVFCV39	ZVFCV42	ZVFCV47	
А	33″	34³/₄"	39½″	
В	465/8″	491/8"	55 <sup>13</sup> /16"	
C	131/4"	131/2"	15¹/₄"	
D	39½"	421/2"	48½″	
Ε	65 <sup>15</sup> /16"	697/16"	78 <sup>15</sup> /16"	

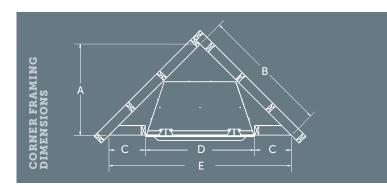

## **UNIT AND FRAMING SPECIFICATIONS (IN.)**

		Height Framing				
ZVFCV39	37 1/4"	37 5/16"	39 3/8"	39 1/2"	20 3/16"	20 5/16"
ZVFCV42	40 5/16"	40 3/8"	42 7/16"	42 1/2"	20 3/16"	20 5/16"
ZVFCV47	45 3/8"	45 7/16"	48 3/8"	48 1/2"	22 1/2"	22 5/8"

## FIREBOX SPECIFICATIONS (IN.)

Model	Firebox Height	Firebox Width (Front)	Firebox Width (Back)	Firebox Depth
ZVFCV39	291/8"	29 <sup>3</sup> / <sub>4</sub> "	22 <sup>1</sup> / <sub>2</sub> "	15 <sup>1</sup> / <sub>2</sub> "
ZVFCV42		33 <sup>7</sup> / <sub>8</sub> "	26 <sup>7</sup> / <sub>8</sub> "	15 <sup>1</sup> / <sub>2</sub> "
ZVFCV47		39 <sup>3</sup> / <sub>4</sub> "	29 <sup>3</sup> / <sub>4</sub> "	17 <sup>1</sup> / <sub>4</sub> "



LOGF18 Log Set



LOGF30 Log Set (For ZVFCV47 only)



a program of continuous testing, refinement and improvements of all its publication. Certification: ANSI Z21.91-2007 ventless firebox enclosures for a

