


ZCVRB47/60/72

DIRECT VENT LINEAR GAS FIREPLACE



ZCVRB60NE Zero Clearance Direct Vent Fireplace (Natural Gas), RBCB1 Cannonballs.

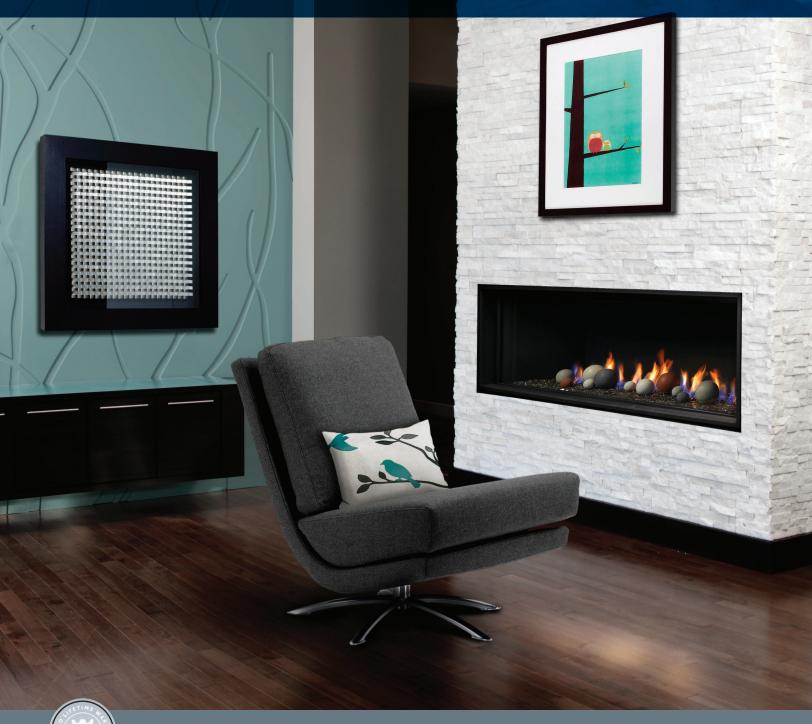

Warm up your favourite room with the beauty of a Linear Fireplace.

# ZCVRB47/60/72

## **STANDARD FEATURES**

- Hi/Low Millivolt or IPI valve system will operate during power failures
- Decorative Bronze Glass
- Mobile Home, Bedroom and Bed Sitting Room approved
- Safety Screen Barrier

# **OPTIONAL FEATURES**

**Surround** Stainless Steel or Black

Fan Kit Heat activated with variable speed control

**Universal Light Kit** Accent Lighting – Halogen Lamps

## Wall Mount Thermostat

Standard On/Off or Programmable 5 day (weekday) and 2 day (weekend)

Liner Porcelain Reflective

Media Options

Multi-Colored Cannonballs

### **Remote Control**

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

#### \*Enclosure Grill Opening

Model	Front Width	Front Height	Side Width	Side Height
ZCVRB47	46 3⁄4″	2 5/8″	15 <sup>1</sup> /4″	6 5/8"
ZCVRB60	60 5/8″	3 5/8"	15 <sup>1</sup> /4″	6 5/8"
ZCVRB72	78 5/8″	3 5/8"	15 <sup>1</sup> /4″	9″

\*When appliance is installed using vented chase technology.





IPI OR MV





The ultimate in Zero Clearance Direct Vent Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.



ZCVRB72NE Zero Clearance Direct Vent Fireplace (Natural Gas), ZCVRB72PL Porcelain Reflective Liner. (Shown as a Vented Chase – VL72EGS Front Enclosure Grill)



ZCVRB47 Direct vent linear gas fireplace





## ZCVRB47 PRODUCT SPECS

## ADDITIONAL ZCVRB47 FIREPLACE STYLES

Acert Jay

Model
Fuel
Gas Control
Input Max.
Input Min.
FE (P.4.1-15)
Glass Size
Venting

ZCVRB47N ZCVRB47NE Natural Millivolt / IPI 24,500 BTU 16,500 BTU 55.26% / 57.31% 40 <sup>5</sup>/8" x 13 <sup>7</sup>/8" 4"/7" Flex or 4" x 6 <sup>5</sup>/8" Hard Pipe

## **FIREPLACE DIMENSIONS**

# FRAMING DIMENSIONS

ZCVRB47LP

Propane

ZCVRB47LPE

Millivolt / IPI

24,500 BTU

20,500 BTU

55.01% / 57.10%

40 <sup>5</sup>/8" x 13 <sup>7</sup>/8"

4"/7" Flex or

4" x 6 5/8"

Hard Pipe

ZCVRB47N Width Height Depth 46 <sup>5</sup>/8" 38 <sup>5</sup>/8" 17 <sup>3</sup>/4" ZCVRB47 Width Height Depth 47" 38 3/4" 18 1/4"\*

\*dependent of finishing material used.

ZCVRB47NE Zero Clearance Direct Vent Fireplace (Natural Gas), RBCB1 Cannonballs x14, ZCVRB47PL Porcelain Liners.



ZCVRB47NE Zero Clearance Direct Vent Fireplace (Natural Gas), ZCVRB47PL Porcelain Reflective Liner. (Shown as a Vented Chase – V46EG Front Enclosure Grill)

ZCVRB47NE Zero Clearance Direct Vent Fireplace (Natural Gas), ZCVRB47PL Porcelain Liners.



**ZCVRB60 DIRECT VENT** LINEAR GAS FIREPLACE





THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

## **ZCVRB60 PRODUCT SPECS**

Model

Venting

## **ADDITIONAL ZCVRB60** FIREPLACE STYLES

ZCVRB60N Zero Clearance Direct Vent Fireplace (Natural Gas), ZCVRB60S1BL Surround (Black), ZCVRB60PL Porcelain Liners.

kand under the

Natural Fuel Gas Control Millivolt / IPI Input Max. 35,000 BTU Input Min. 23,000 BTU FE (P.4.1-15) Glass Size 60" x 17 1/8"

ZCVRB60N ZCVRB60LP ZCVRB60NE ZCVRB60LPE Propane Millivolt / IPI 35,000 BTU 28,000 BTU 55.27% / 56.66% 55.27% / 56.66% 60" x 17 1/8" 5″/8″

# **FIREPLACE DIMENSIONS**


#### FRAMING DIMENSIONS

ZCVRB60N			ZCVRE	ZCVRB60		
Width	Height	Depth	Width	Height	Depth	
66 3/16"	39 %16″	19 <sup>1</sup> /4"	67"	39 <sup>3</sup> /4"	19 <sup>1</sup> /4"*	

5″/8″

\*dependent of finishing material used.

ZCVRB60NE Zero Clearance Direct Vent Fireplace (Natural Gas), ZCVRB60S1SS Surround (Stainless Steel), RBCB1 Cannonballs x14, ZCVRB60PL Porcelain Liners. (Shown with V60EG Enclosure Grill Installation)

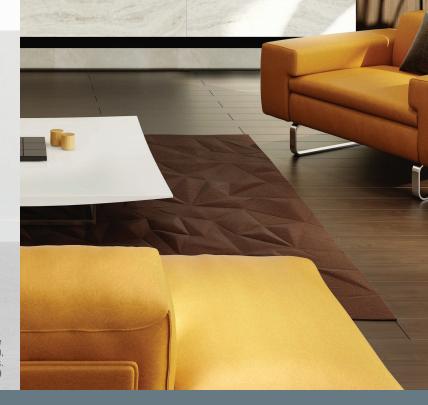



**ZCVRB72 DIRECT VENT** LINEAR GAS FIREPLACE



ZCVRB72NE Zero Clearance Direct Vent Fireplace (Natural Gas), RBCB1 Cannonballs x14, ZCVRB72PL Porcelain Liners.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

## ZCVRB72 PRODUCT SPECS

## ADDITIONAL ZCVRB72 FIREPLACE STYLES



ZCVRB72NE Zero Clearance Direct Vent Fireplace (Natural Gas), ZCVRB72S1SS Surround (Stainless Steel), RBCB1 Cannonballs x14, ZCVRB72PL Porcelain Liners.



# **ACCESSORY OPTIONS**

# **PRODUCT SPECIFICATIONS**

## **MEDIA OPTIONS**



Decorative Ember Glass – Bronze



Cannonballs

## LINERS




Porcelain Reflective Liner

## **SURROUNDS**




Black

# Stainless

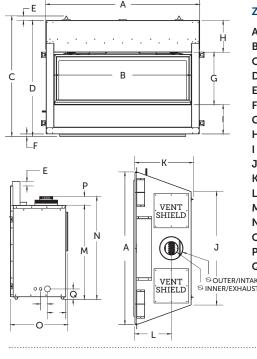


ZCVRB47	ZCVRB60	ZCVRB72
<b>A</b> 46 5/8"	<b>A</b> 66 <sup>3</sup> / <sub>16</sub> "	<b>A</b> 78 <sup>3</sup> /4"
<b>B</b> 41 5/8″	<b>B</b> 61 <sup>1</sup> /8"	<b>B</b> 73 7⁄8″
<b>C</b> 38 5/8″	<b>C</b> 39 %16″	<b>C</b> 42″
<b>D</b> 35 <sup>11</sup> / <sub>16</sub> "	<b>D</b> 38 5/16"	<b>D</b> 40"
<b>E</b> 2 <sup>1</sup> /4"	<b>E</b> <sup>1</sup> / <sub>2</sub> ″	<b>E</b> 1 <sup>1</sup> / <sub>2</sub> "
<b>F</b> <sup>3</sup> /4"	<b>F</b> <sup>3</sup> / <sub>4</sub> "	<b>F</b> <sup>3</sup> / <sub>4</sub> "
<b>G</b> 15 7⁄8″	<b>G</b> 19 <sup>15</sup> / <sub>16</sub> "	<b>G</b> 20″
<b>H</b> 11″	<b>H</b> 9 %16″	<b>H</b> 11 <sup>15</sup> / <sub>16</sub> "
8 <sup>13</sup> / <sub>16</sub> "	8 <sup>13</sup> / <sub>16</sub> "	<b>I</b> 7 <sup>1</sup> /4"
<b>J</b> 34 5/8″	<b>J</b> 53 <sup>3</sup> /8″	<b>J</b> 71 <sup>3</sup> /4"
<b>K</b> 17 <sup>3</sup> /4″	<b>K</b> 19 <sup>3</sup> /8″	<b>K</b> 19 <sup>3</sup> /8″
L 11 <sup>1</sup> /16"	L 11 %16"	L 12 <sup>1</sup> /4"
<b>M</b> 29 <sup>1</sup> / <sub>16</sub> "	<b>M</b> 33 <sup>1</sup> /16"	<b>M</b> 34 ½″
<b>N</b> 31 <sup>11</sup> /16″	<b>N</b> 35 <sup>3</sup> /4"	<b>N</b> 40 <sup>5</sup> / <sub>16</sub> "
<b>O</b> 17 <sup>3</sup> /4″	<b>O</b> 18 <sup>3</sup> /4"	<b>O</b> 19 3/8″
<b>P</b> 2 <sup>11</sup> / <sub>16</sub> "	<b>P</b> 2 <sup>11</sup> / <sub>16</sub> "	<b>P</b> 4 <sup>3</sup> / <sub>4</sub> "
<b>Q</b> 3 <sup>3</sup> /16"	<b>Q</b> 3 <sup>3</sup> /16"	<b>Q</b> 3 <sup>3</sup> / <sub>16</sub> "
TAKE UST		


OPTIONAL SURROUND



OPTIONAL FRONT ENCLOSURE GRILL V46EG/VL60EG/VL72EG



OPTIONAL SIDE GRILL - VL60EGS/VL72EGS M



ZCVRB47	ZCVRB60	ZCVRB72
<ul> <li>A 44 5/8"</li> <li>B 1 1/5"</li> <li>C 1 1/2"</li> <li>D 17 3/4"</li> <li>E 1"</li> <li>F 1 3/4"</li> </ul>	<ul> <li>A 64"</li> <li>B 1 <sup>1</sup>/2"</li> <li>C 1 <sup>1</sup>/2"</li> <li>D 23"</li> <li>E <sup>3</sup>/4"</li> <li>F 1 <sup>3</sup>/4"</li> </ul>	<ul> <li>A 76 <sup>3</sup>/4"</li> <li>B 1 <sup>1</sup>/2"</li> <li>C 1 <sup>1</sup>/2"</li> <li>D 23"</li> <li>E <sup>3</sup>/4"</li> <li>F 1 <sup>3</sup>/4"</li> </ul>
<ul> <li>G 47 <sup>13</sup>/<sub>16</sub>"</li> <li>H 3 <sup>13</sup>/<sub>16</sub>"</li> <li>I 46 <sup>9</sup>/<sub>16</sub>"</li> <li>J 2 <sup>1</sup>/<sub>2</sub>"</li> <li>K 1 <sup>9</sup>/<sub>16</sub>"</li> </ul>	<ul> <li>G 61 <sup>3</sup>/<sub>4</sub>"</li> <li>H 4 <sup>7</sup>/<sub>8</sub>"</li> <li>I 60 <sup>1</sup>/<sub>2</sub>"</li> <li>J 3 <sup>1</sup>/<sub>2</sub>"</li> <li>K 1 <sup>9</sup>/<sub>16</sub>"</li> </ul>	<ul> <li>G 79 3/4"</li> <li>H 4 7/8"</li> <li>I 78 1/2"</li> <li>J 3 1/2"</li> <li>K 1 9/16"</li> </ul>
L 16 <sup>3</sup> /16" M 7 7/8" N 6 7/16" O <sup>1</sup> /4" P 15 7/16" Q 2 9/16"	<ul> <li>L 16 <sup>3</sup>/16"</li> <li>M 7 <sup>7</sup>/8"</li> <li>N 6 <sup>7</sup>/16"</li> <li>O <sup>1</sup>/4"</li> <li>P 15 <sup>7</sup>/16"</li> <li>Q 2 <sup>9</sup>/16"</li> </ul>	<ul> <li>L 16 <sup>3</sup>/16"</li> <li>M 10 <sup>3</sup>/8"</li> <li>N 8 <sup>15</sup>/16"</li> <li>O <sup>1</sup>/4"</li> <li>P 15 <sup>7</sup>/16"</li> <li>Q 2 <sup>9</sup>/16"</li> </ul>



## VENTED CHASE OPTIONS


The chase of the appliance may be vented to achieve Cool Touch Walls or reduced Mantel Clearances. The following options are available to vent the chase:

- The top of the chase can be left open.
- A grill can be installed on the front of the chase.
- If the chase bumps out into the room, side grills can be installed on each side of the chase.


Minimum enclosure height for a vented chase is measured from bottom of fireplace, ventilation of minimum free air opening is required. Choose between our Enclosure Grills (Front or Sides) or Custom Grill (if custom grills are used the louvers cannot slope) or adequate ventilation opening as stated in the manual. Grill or opening must meet minimum (as specified in the installation manual) of chase top/ceiling.

SPECIFICATIONS	ZCVRB47	ZCVRB60	ZCVRB72
WITH OPENINGS (MIN. NO GRILLS) Min. Enclosure Height Min. Opening Below Ceiling	105 sq/in. 70" 1-¼"	200 sq/in. 76" 1-7⁄8"	285 sq/in. 79" 2-¾"
WITH GRILLS (MIN. AIR FREE OPENINGS) Min. Enclosure Height Grill Opening (Max. Distance from top of Ceiling)	105 sq/in. 70" 2"	220 sq/in. 76" ³⁄₄"	285 sq/in. 79" 3⁄4"


Framing to ceiling with open front



Framing to ceiling with front or side vents Framing to ceiling, minimum enclosure with front or side vents Framing to ceiling with vents at front and back Minimum enclosure with front and back vents



Minimum enclosure with front or side vents



NOTE: To vent the fireplace chase, removal of vent shields from the fireplace is required.





2340 Logan Avenue Winnipeg, Manitoba, Canada R2R 2V3 Phone: (204) 632-1962 Fax: (204) 632-1960 www.kingsmanfireplaces.com

ZCVRB47N Zero Clearance Direct Vent Gas Fireplace (Natural Gas), ZCVRB47S1SS Surround (Stainless Steel), ZCVRB47PL Porcelain Liners. (Shown with Vented Chase Installation – top of chase left open)



FOR CALIFORNIA RESIDENTS ONLY: WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

ALCONT ST



Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-15



 $(\mathbf{I})$ 

CRAFTED ENTIRELY IN CANADA, EACH KINGSMAN FIREPLACE IS BUILT TO THE HIGHEST STANDARDS AND MADE TO LAST.

te a c

nit. Discuss with

iins a program of <u>ne a</u>spect of units