



MVF40

VENT-FREE MULTI-SIDED FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

Model MVF40 Vent Free Multi-Sided Fireplace, GLMV40MVP Burner System – Liquid Propane, LOGC31 Split Oak Log Set, MVF40PK Peninsula Kit, MGPBKL Grill Kit Peninsula – Black.



2340 Logan Avenue
 Winnipeg, Manitoba, Canada R2R 2V3
 Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com

| | | |
|---------------------|---------------|---------------|
| Burner Model | GLMVF40MVN | GLMVF40MVN |
| Fuel | Natural | Propane |
| BTU Input | 25,900-38,200 | 24,200-30,500 |
| Type | Millivolt | Millivolt |
| Log Set | LOGC31 | LOGC31 |

Create an elegant and warm focal point in your homewith the Ultimate in Zero Clearance Vent-Free Fireplaces for New Home Construction or Renovation.

STANDARD FEATURES

- Matchless Pieso Ignition
- ODS Safety Pilot
- Millivolt Control with Variable Flame and BTU Control
- Wall Switch Control
- Decorative Rock

OPTIONAL FEATURES

Grills

Black

Refractory Liner

End Panel, Side Panel

Surrounds Wide (for See-through only)

Black

Fan Kit

Thermostat (Millivolt)

Wall Mount Millivolt Thermostat or Programmable Thermostat





Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control




UNIT AND FRAMING SPECIFICATIONS (IN.)

| Model | Height Framing | Width Framing | Depth Framing |
|---------------|----------------|---------------|---------------|
| PENINSULA | 33 3/4" | 20 5/8" | 38 7/8" [1] |
| SEE-THRU | 33 3/4" | 20 5/8" | 41 1/8" [2] |
| BAY PENINSULA | 33 3/4" | 23 11/16" | 35 1/16" [3] |
| CORNER | 33 3/4" | 23 3/4" | 38 7/8" [4] |
| ISLAND | See Manual | | |

1. MVF40 Fireplace, GLMVF40MVP Burner System, LOGC31 Split Oak Log Set, MVF40SK See-Through Kit, MGSKBL Grill Kit See Through – Black.
2. MVF40 Fireplace, GLMVF40MVP Burner System, LOGC31 Split Oak Log Set, MVF40CK Corner Kit, MGCKBL Grill Kit Corner – Black.

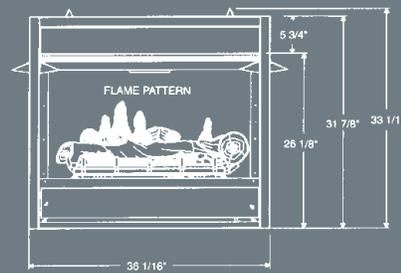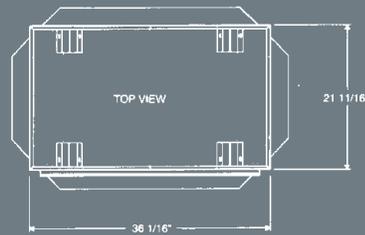

- [1] Using Nailing Tabs with 1/2" Facing, Otherwise 37 9/16"
- [2] Using Nailing Tabs, Otherwise 40 1/16"
- [3] Using Nailing Tabs with 1/2" Facing, Otherwise 13 1/8"
- [4] Using Nailing Tabs with 1/2" Facing, Otherwise 37 9/16"

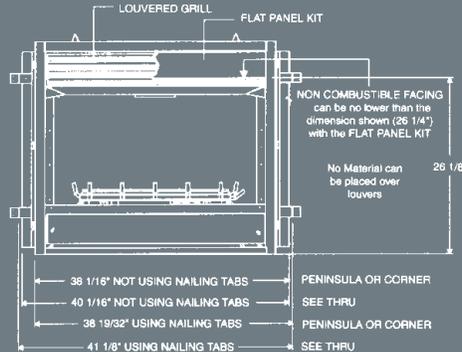

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.
 Kingsman Industries maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: The model MVF40 is certified for USA to IAS2-97. The burners MVFBL4040MVN, MVFBL4040MVP, MVFBR4040MVN, MVFBR4040MVP are certified for USA to ANSI Z21.11.2b – 2004, ANSI Z21.11.2 – 2002, ANSI Z21.11.2a – 2003. The burners GLMVF40MVN, GLMVF40MVP are certified for USA to ANSI Z21.11.2 – 2004, ANSI Z21.60/CGA 2.26 – M2003.



CRAFTED ENTIRELY IN CANADA, EACH KINGSMAN FIREPLACE IS BUILT TO THE HIGHEST STANDARDS AND MADE TO LAST.

Printed in Canada
 09/18 – B014



FOR CALIFORNIA RESIDENTS ONLY:

WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.